

Part number

TM 1665 SP



Interlocked switched socket-outlet, TM series,
3 poles + N + PE, 6 h (red), 16 A, 200/346 ÷
240/415 V, without fuse-carrier, with base box

Product description

Product type	Interlocked switched socket-outlet
Series	TM..SP/KSP
N. of poles	3 poles + N + 
Clock position	6
Size	115 x 450 x 18 mm
Specification	Without fuse-carrier With base box

Technical data

Current	16 A
Voltage	200/346 ÷ 240/415 V
IP degree of protection	IP66/IP67

Further technical details

Weight	1.400,00 g
Operating temperature range (min, max)	-25°C ... +40°C
UL 94 flammability rating	V-2
IK rating (impact degree of protection)	IK10

Material properties

Colour	RAL 7012 grey, RAL 3000 red
---------------	-----------------------------

Approvals / Standards

Reference standard	EN 60309-1 and -2
---------------------------	-------------------

General ordering information

EAN13 code	8015747100434
-------------------	---------------

Packaging Information


Packaging weight	12,60 kg
Packaging volume	55,44 dm ³
Packaging description	Carton box
Packaging quantity	9 Pcs
Packaging EAN code	8015747103305
Sub-packaging weight	1,40 kg
Sub-packaging description	Plastic packaging
Sub-packaging quantity	1 Pcs
Sub-packaging EAN barcode	8015747103312

Part number

TM 1665 SP



Catalogue drawings

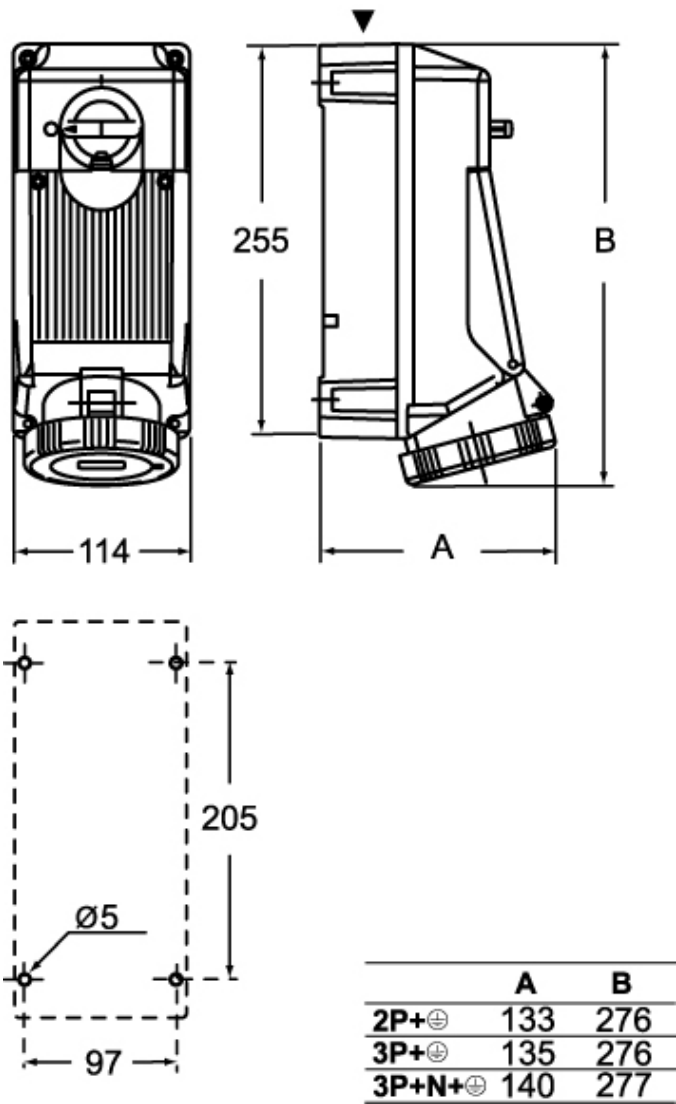

Notes

Dimensions shown in mm are not binding and may be changed without notice.