

Part number

TM 6363 SP



Interlocked switched socket-outlet, TM series,
2 poles + PE, 6 h (blue), 63 A, 200 ÷ 250 V,
without fuse-carrier, with base box

Product description

Product type	Interlocked switched socket-outlet
Series	TM..SP/KSP
N. of poles	2 poles + 
Clock position	6
Size	145 x 565 x 18 mm
Specification	Without fuse-carrier With base box

Technical data

Current	63 A
Voltage	200 ÷ 250 V
IP degree of protection	IP66/IP67
Further technical details	
Weight	3.280,00 g
Operating temperature range (min, max)	-25°C ... +40°C
UL 94 flammability rating	V-0 (insert), V-2 (enclosure)
IK rating (impact degree of protection)	IK10

Material properties

Colour	RAL 7012 grey, RAL 5015 blue
---------------	------------------------------

Approvals / Standards

Reference standard	EN 60309-1 and -2
---------------------------	-------------------

General ordering information

EAN13 code	8015747100601
-------------------	---------------

Packaging Information



Sub-packaging length	150,00 mm
Sub-packaging height	188,00 mm
Sub-packaging width	430,00 mm
Sub-packaging weight	3,28 kg
Sub-packaging volume	12,13 dm ³
Sub-packaging description	Carton box
Sub-packaging quantity	1 Pcs
Sub-packaging EAN barcode	8015747103138

Part number

TM 6363 SP



Catalogue drawings

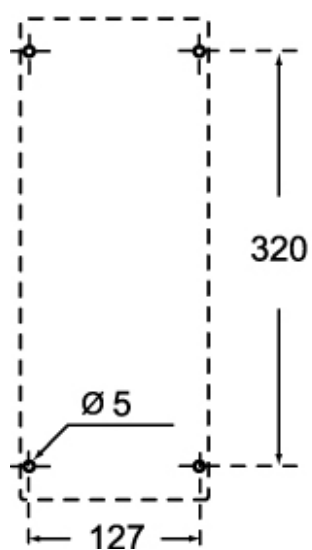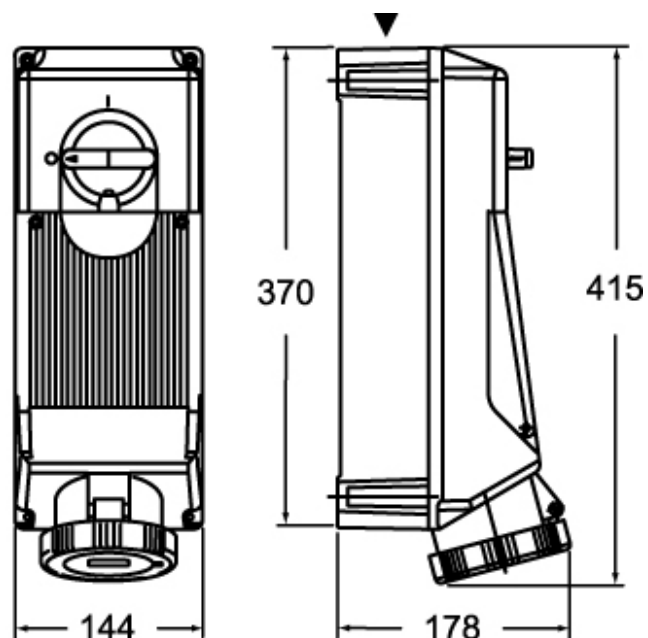

Notes

Dimensions shown in mm are not binding and may be changed without notice.