

LEV71951

Toughbay Pro Sensors

Toughbay Pro MW Dim Sensor IP65

Features & Benefits

- Plug and play microwave sensor for use with Toughbay™ Pro
- Simple screw on connection
- Suitable for detection in wide open spaces
- Maximum mounting height: 12m
- Maximum detection with 16m
- Remote control available for quick and simple programming of each sensor
LEV71808




General Information

Mounting	Screw fit to centre of lense
Environment	Demanding
Color Finish	Opal/White
Product Shape	Circular
Product Range	Toughbay™ Pro
Overall Dimensions	44Ø x 12
Height (mm)	12
Diameter (mm)	44
Product Weight(kg)	0.02
Additional Information	Requires LEV71808 Remote Control
Method of fix	Screw fit
IP Rating	65
Origin of manufacturer	Made in China
Warranty	5 Year Warranty(see website for terms and conditions)
Customs Tariff code**	9405920090

Electrical

Voltage Rating	12VDC +/- 2VDC
Primary Running Current(Amp)	0.025(+/- 0.005)

Class	III
Thermals	
Operating Temperature Range °C	0°C TO 40°C
Controls and Sensors	
Detection Distance	See instruction sheet
Detection Motion Speed	(0.3-1 m/s) @10m
Detection Range	See instruction sheet
Installation Height	10m (12m) Max.(when mounted at 12m, do not set detection area 25% or 50%, it will not detect correctly)
Detection area	25%/50%/75%/100%
Hold time	5s/30s/1 min/3min/5min/10min/20min/30min
Lux settings	51ux/15Lux/30Lux/50Lux/1001ux/1501ux/Disable
Transmitting power	Microwave motion detector(5.8GHz+75MHz)
Standby period	0s/10s/1 min/3min/5min/1 0min/30min/+ ∞(for on/off function set to 0s)(for 2 step dimming set to + ∞)(For 3 step dimming set to 10s/1 min/3min/5min/1 0min/30min + DH)
Standby-dimming level	10% / 20% / 30% / 50%
Sensor Default settings	Detection area:100%,Hold time:3 min, Stand-by Period: 5 min, Stand-by dim level:50%, Daylight Sensor: Disable
Installation spacing between fittings	3m
Packaging	
Product carton overall dimensions(cm)	6.6 x 6.4 x 4cm
Product Packaged Weight(kg)	0.04
Quantity Per Outer Carton	100
Outer carton(L)- cm	43
Outer carton(W)- cm	35
Outer carton(H)- cm	15
Outer carton Net weight- kg	4.0
Outer carton Gross weight- kg	4.44
Product Bar Code EAN-13 Number	5052544123276
Outer carton Bar Code ITF-14 Number	15052544123273
Standards & Approvals	
CE Marked	Yes
UKCA Marked	Yes
Date code/Purchase order No.	Yes
WEEE symbol	Yes
Certificate Of Conformity	Available on request
Accredited Members	LIA, ISO9001-2015, ISO14001-2015

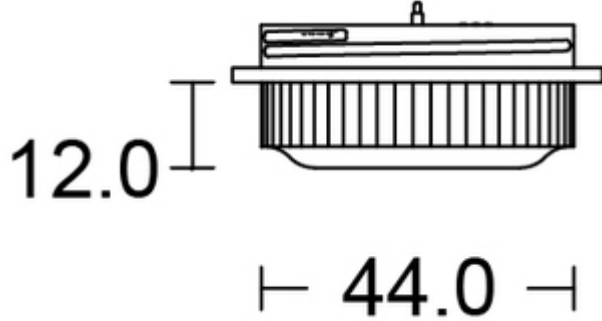

**JCC Lighting Limited makes every effort to ensure that the Customs Tariff information in this document is timely and accurate. However, it's not possible for us to assure the absolute veracity and completeness of that information, as errors may occur. The placement of any inaccurate tariff information is completely unintentional. JCC Lighting Limited reserves the right, in its sole discretion, to correct any errors or omissions to the tariff code and to make any and all changes contained in this document at any time and without notice. It is the sole responsibility of the importer to ensure that the commodity code advised is correct for the products/goods being supplied by JCC Lighting Limited. JCC Lighting Limited does not assume any liabilities, losses, costs, and expenses arising out of or related to the importers use of this commodity code or the information related to the import of any JCC Lighting products.

JCC Lighting LTD, Lux Park, Chichester Business Park, City Fields Way, Tangmere, Chichester, West Sussex, PO20 2FT.
Sales: 01243 838999 (8am to 5pm Monday to Friday) Fax: 01243 838998 | sales@jcc.co.uk | www.jcc.co.uk
Company Registration Number: 03044848 | VAT Number: 918544112

This document is uncontrolled if printed, all information is subject to change

Version 23 [12/07/2024]