


## Infrared Thermometers

### IR5 Dual Laser Infrared Thermometer

- Optical Resolution (Distance-to-spot) is 12:1
- Features include dual-laser targeting, auto-scan, max/min/avg/diff, high/low alarm, backlit display, auto power-off
- Measurement Range: -30° to 400°C
- For ambient temperatures above freezing, the accuracy is +/- 16° C or +/- 2%; Accuracy below freezing is +/- 16° C plus 0.2 degrees per degree below 0° C
- Drop protection to 2 m
- Uses one 9-volt battery, with battery life expectancy at 10 hours of continuous use with laser and backlight on
- Certified to IEC EN 61326-1:2006, EN608251:1994+A2:2001+A1:2002
- Adjustable emissivity
- Includes custom pouch and batteries

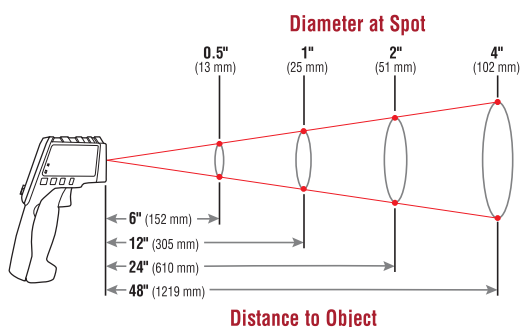

A-IR5



| Cat. No. | Overall Length | Overall Height | Overall Width | Batteries | Weight  |
|----------|----------------|----------------|---------------|-----------|---------|
| A-IR5    | 173 mm         | 115 mm         | 47 mm         | 1 x 9V    | 0.28 kg |

### IR10 Dual Laser Infrared Thermometer

- Incorporates surface temperature measurement capability using IR emission and can also measure bulk temperatures of air, gas, or liquids using a standard K-Type probe
- Dual targeting lasers offer more accurate determination of the area being tested
- Optical Resolution (Distance-to-Spot) is 20:1
- Measurement range for both IR and K-Type probe -40 to 1200-Degree Fahrenheit (-40 to 650-Degree Celsius)
- Adjustable emissivity from 0.1-1.0 delivers flexibility to address multiple applications
- Bright backlit display for working in low ambient lighting conditions
- Statistical parameters for measurement event - max/min/avg/diff
- User definable high/low limits with audible and visual alarms when limits are breached
- Uses one 9-volt alkaline battery, with battery life expectancy at 8 hours of continuous use with laser and backlight on
- Includes custom pouch, K-Type probe and battery
- Soft-touch, over-mold housing; built to withstand a 9.9-Foot (3 m) drop
- IP54 ingress protections for dust and water resistance



A-IR10



| Cat. No. | Overall Length | Overall Height | Overall Width | Batteries | Weight  |
|----------|----------------|----------------|---------------|-----------|---------|
| A-IR10   | 178 mm         | 114 mm         | 52 mm         | 1 x 9V    | 0.25 kg |