



≥ 150mm thick rigid walls



Performance	EI 90 / E 120
Fire resistance	EN 1366-3
Classification	EN 13501-2
Ø cable	OD ≤ Ø 21 mm
Cable loading	0% to 100%

Not at scale. Units in millimeters

Please refer to Installation Sheet for grouted devices CM250018

Opening dimensions

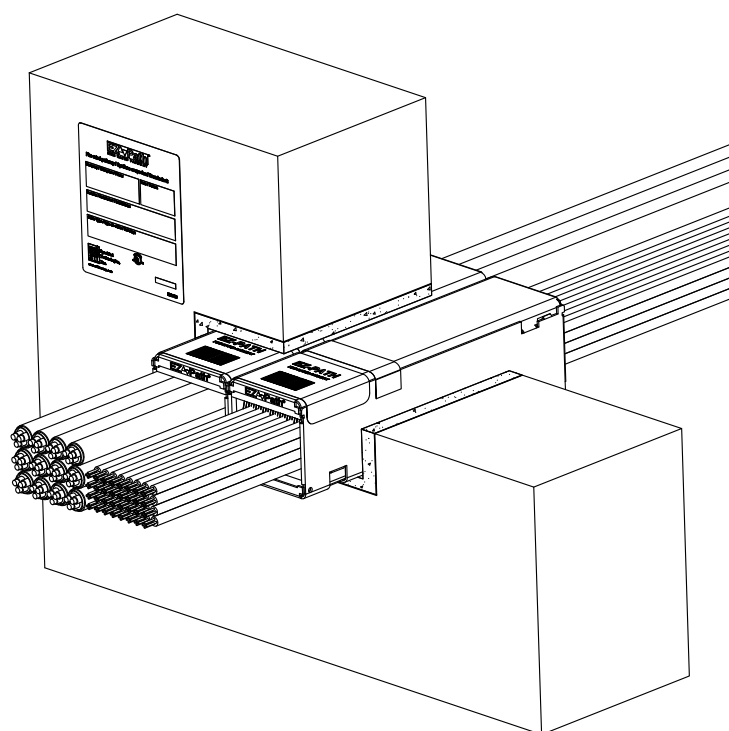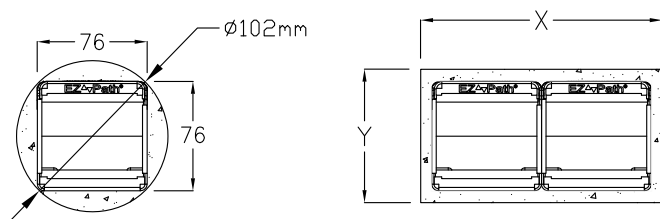

Opening	 CM250018 1 x EZD33T	 CM250018 2 x EZD33T
X	90mm +/- 5mm	170mm +/- 5mm
Y	90mm +/- 5mm	90mm +/- 5mm

