

Product Description

- Cable management solution
- Supports easy installation, moves, additions and changes
- Cable friendly design, no sharp edges
- Up to 100% visual cable loading
- Approved for all types of cables
- Mechanical system for easy installation
- For fire and smoke barriers
- Fire rated by design, no firestop handling
- Compliant all the time

Applications

- For all types of cables (up to Ø50 mm)
- Rigid walls, flexible walls and rigid floors

Firestop Handling

- No handling required for safety compliance

Technical Data




Fire Resistance (EN 1366-3)	4 Hours
Classification (EN 13501-2)	EI 120
Reaction to Fire (EN 13501-1)	Class E
Sound Insulation (ASTM E90)	STC 54 (relates to specific construction)
Air Leakage (EN1026 and UL1479)	1.57 m3/h, 0% cable 3.24 m3/h, 100% cables
Durability and Serviceability	Type Y2

Shell Composition	1.5 mm thick galv. steel
Expansion begins	177 °C
Volume Expansion	800%
In-Service Temperature	Not to exceed 49°C
Shelf Life	No limit
VOC Content ASTM D3960 or EPA Method 24	None


Ordering Information

		
CM250058	2.67	1


CM250058 EZD44T

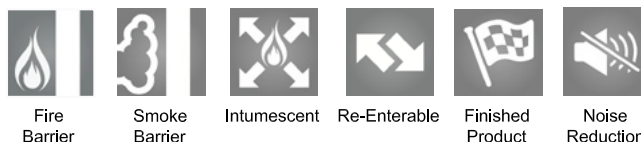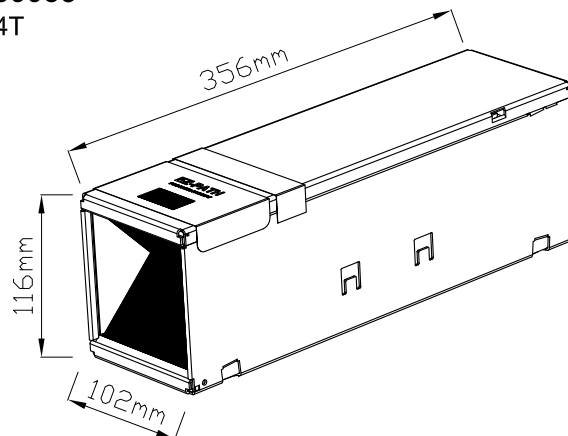


Cable loading
85mm x 92mm



Ø7mm cable
156x



Ø15mm cable
30x



Ø35mm cable
4x

Approvals

- European Technical Approval ETA - 13/0993




0843




Plate Kits

CM250058 + CM350700
EZD44T + EZP144WE




Up to Ø21mm OD cables

CM250058 + CM350701
EZD44T + EZP144RSE




Up to Ø21mm OD cables

CM250058 + CM250230
EZD44T + EZP144WT




Up to Ø80mm OD cables

CM250058 + CM350703
EZD44T + EZP144MBE




Up to Ø21mm OD cables

CM250058 + CM250260
EZD44T + EZG144T



Up to Ø80mm OD cables


CM250058 + CM350702
EZD44T + EZP544WE



Up to Ø21mm OD cables


used in association with
Rockwool FirePro® Ablative Coated Batt

CM250058 + CM250250
EZD44T + EZP544WT



Up to Ø80mm OD cables


CM250058 + CM350704
EZD44T + EZP544MBE

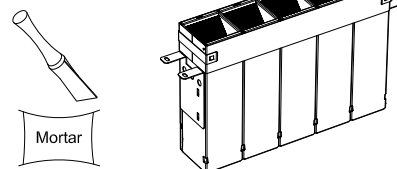

Up to Ø21mm OD cables


Optional, used in association with **Rockwool FirePro®**
Ablative Coated Batt and Firepro® Compound

CM250058 + CM250370
EZD44T + EZG444T



Up to Ø80mm OD cables

CM250058 + CM250380
EZD44T + EZG844T

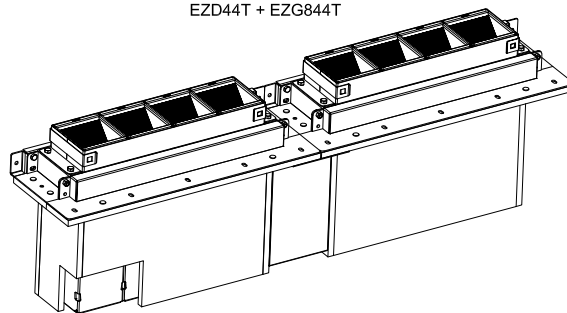


Up to Ø80mm OD cables



Please refer to the corresponding Application Sheet and Installation Sheet

Accessories

CM250178
EZD44ES



CM250178 + CM250058
EZD44ES + EZD44T

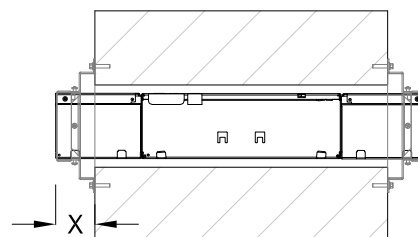

Please refer to the Technical Data Sheet