
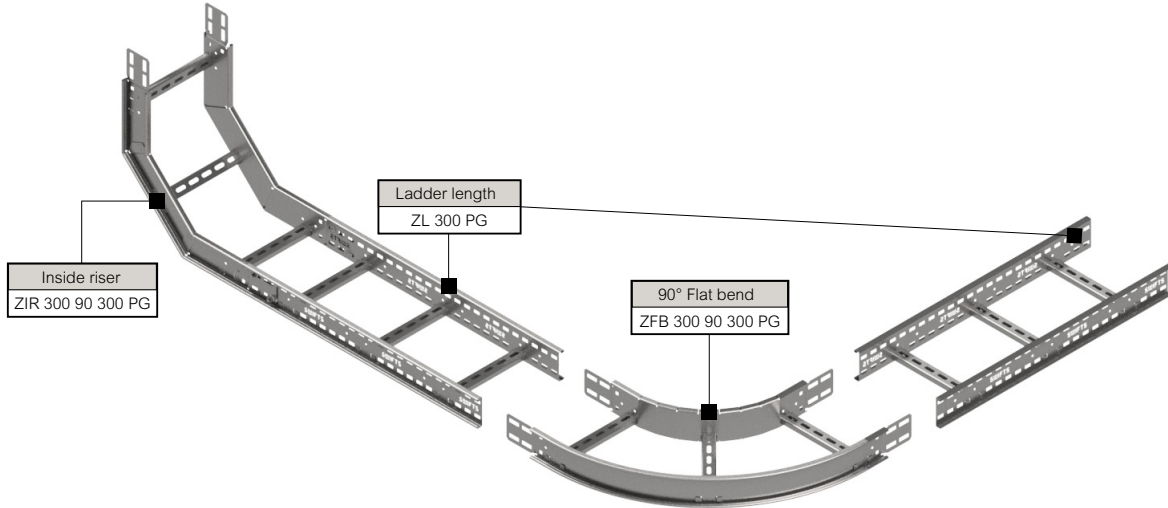


Swifts® pre-galvanised medium duty (Topaz) cable ladder

lengths and fittings



When connecting fittings to straight lengths, use fastener sets (see below)

Rung spacing : 300 mm between centres. Rung Type 1
Standard radius for fittings : 300 mm

For details of technical information for the Swifts cable ladder range, visit www.legrand.co.uk

Pack	Cat. Nos.	Straight lengths – 3 m
1	ZL 150 PG	150 mm width
1	ZL 300 PG	300 mm width
1	ZL 450 PG	450 mm width
1	ZL 600 PG	600 mm width
1	ZL 750 PG	750 mm width
1	ZL 900 PG	900 mm width

Pack	Cat. Nos.	Coupler sets
1	ZCPG	Straight length to straight length Supplied in pairs, with fasteners (4 per coupler) Use to couple straight lengths to straight lengths
1	ZFC PG	Fitting to fitting Supplied in pairs, with fasteners (4 per coupler) Use to couple fitting to fitting

Pack	Cat. Nos.	Fastener set
50	LFGM10P50	Comprise M10 coach bolt and flange nut Hot dip galvanised

Pack	Cat. Nos.	Fittings
1	ZFBWA _r PG	Flat bends 90° Flat bend 60° Flat bend 45° Flat bend 30° Flat bend
1	ZIRWA _r PG	Inside risers 90° Inside riser 60° Inside riser 45° Inside riser 30° Inside riser
1	ZORWA _r PG	Outside risers 90° Outside riser 60° Outside riser 45° Outside riser 30° Outside riser

For other Swifts cable ladder products, including hot dip galvanised and stainless steel cable ladders, please refer to the main Swifts cable ladder guide downloadable from www.legrand.co.uk

