Swifts® pre-galvanised medium duty (Topaz) cable ladder

lengths and fittings (continued)



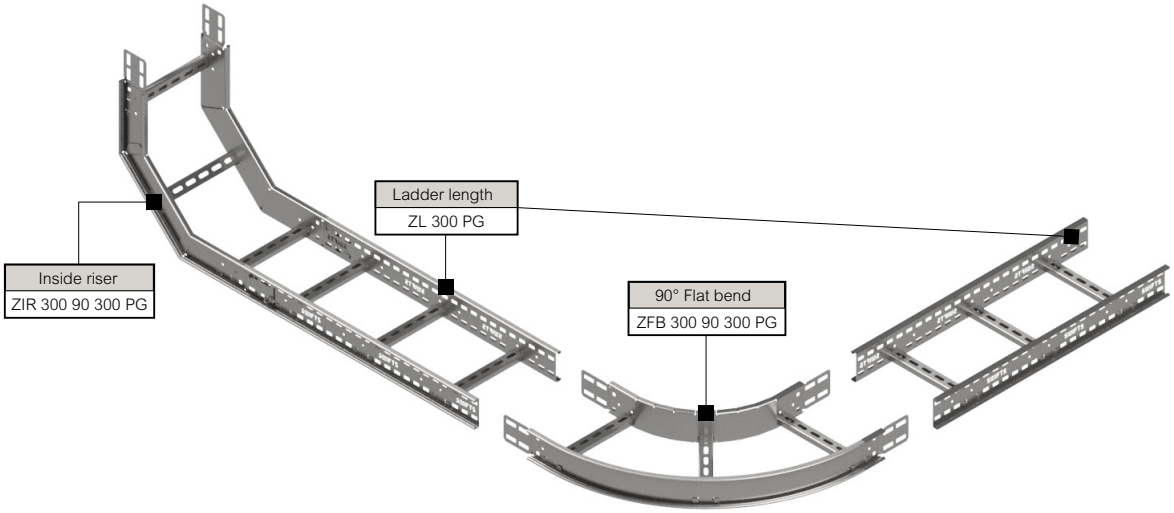

When connecting fittings to straight lengths, use fastener sets (see opposite)
Rung spacing : 300 mm between centres. Rung Type 1
Standard radius for fittings : 300 mm
For details of technical information for the Swifts cable ladder range, visit www.legrand.co.uk

Pack	Cat. Nos.	Fittings (continued)
		Tees and crosspieces For all equal and unequal tees and crosspieces, include R in your ordering code to indicate radius dimension See unequal tee example below Larger width/radius combinations are supplied in two identical halves with fasteners
1	ZTWrRPG	**Equal tees** 
1	ZUTWBrRPG	**Unequal tees** Example : the ordering code for a pre-galvanised unequal tee with a 300 main run (W) and a 150 branch (B) with a 600R radius : ZUT 300 150 600R PG 

Pack	Cat. Nos.	Fittings (continued)
1	ZBW300RPG	**Branch piece** Available in 300 R only 
1	ZXWrRPG	**4 way crosspiece** 
1	ZSRWKPG	**Straight reducers** 
1	ZLRWKPG	**Offset reducers – left hand** 
1	ZRRWKPG	**Offset reducers – right hand** 

Standard dimensions and finishes
Key : selecting medium duty (Topaz) fittings. Replace the letters shown in red with your choice from the following options :
W = Widths (mm) : 150, 300, 450, 600, 750, 900
A = Angle (°) : 90, 60, 45 or 30
B = Branch width (mm) : 150, 300, 450, 600, 750, 900
K = Narrowed width when using a reducer (mm) : 150, 300, 450, 600, 750
r = Radius (mm) : 300, 600

Dimensions and finishes available to special order
Contact us on +44 (0) 370 608 9020
Radius (r) (mm) : 450, 750 and 900
Rungs : Type 2 or type 3
Widths (W) (mm) : 100, 200, 250, 350, 400, 500, 550, 650, 700, 800, 850 and 950
Angles (°) : Available to customer's specification