


LK3238 series fan-and-filter

148x148mm | 65-85 m³/h






Colour	RAL7035, color can be customized
Protection category	IP54 standard, IP55 plus precision filter mat, IP56 plus precision filter mat and protective cover.

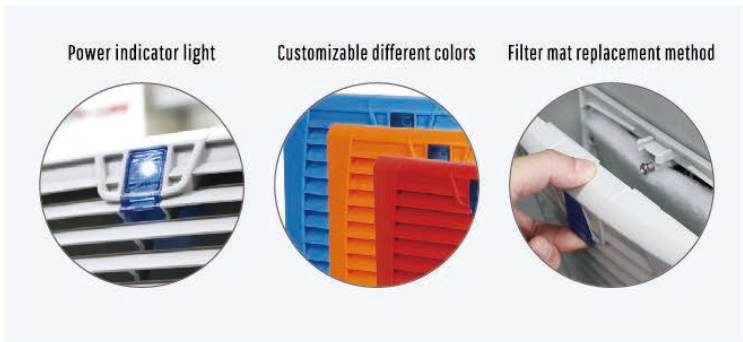

Dimensions

Exit filter LK 3238.300



Model No.fan-and-filter unit LK	3238.230-LK	3238.115-LK	3238.024-LK
Model No.fan-and-filter unit EMC	3238.230-EMC	3238.115-EMC	3238.024-EMC
Rated operating voltage,frequency V,Hz	230V, 50/60HZ	115V, 50/60HZ	24V (DC)
Air throughput,unimpeded air flow	65-85 m ³ /h		85 m ³ /h
Air throughput with Exit filter including standard filter mat	1 x LK 3238.300: 55-70 m ³ /h		
Axial fan	Self-starting shaded pole motor		DC motor
Rated current max.	0.12-0.10 A	0.24-0.20 A	0.35 A
Rated Power	19.0-14.0 W		7.7 W
Noise level	36-40 dB(A)		40 dB(A)
Operating temperature range	-30 - +70 °C		
Model No. Exit filter LK / EMC	3238.300 / 3238.300-EMC		
Design	Made of injection-moulded thermoplastic, customizable flame retardant materials, consistent with UL94-V0 self-extinguishing.		