


LK3239 series fan-and-filter




204x204mm | 105-126 m³/h

Colour	RAL7035,color can be customized
Protection category	IP54-standard, IP55 plus precision filter mat, IP56 plus precision filter mat and protective cover.

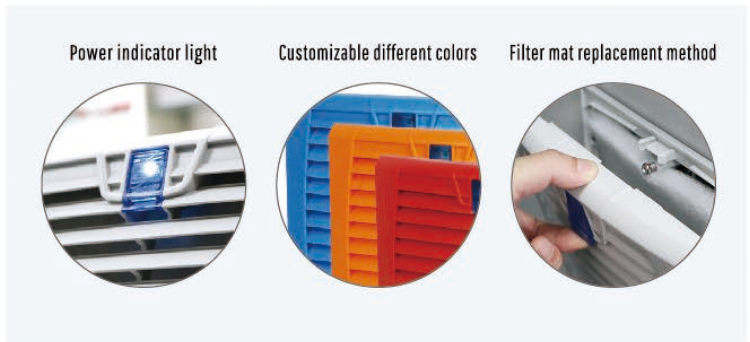

Dimensions

Exit filter LK 3239.300



Model No.fan-and-filter unit LK	3239.230-LK	3239.115-LK	3239.024-LK
Model No.fan-and-filter unit EMC	3239.230-EMC	3239.115-EMC	3239.024-EMC
Rated operating voltage,frequency V,Hz	230V, 50/60HZ	115V, 50/60HZ	24V (DC)
Air throughput,unimpeded air flow	105-126 m ³ /h		105 m ³ /h
Air throughput with Exit filter including standard filter mat	1 x LK 3239.300: 71-82 m ³ /h 2 x LK 3239.300: 85-98 m ³ /h		1 x LK 3239.300: 78-90 m ³ /h
Axial fan	Self-starting shaded pole motor		DC motor
Rated current max.	0.12-0.10 A	0.24-0.20 A	0.35 A
Rated Power	19.0-14.0 W		7.7 W
Noise level	36-40 dB(A)		40 dB(A)
Operating temperature range	-30 - +70 °C		
Model No. Exit filter LK / EMC	3239.300 / 3239.300-EMC		
Design	Made of injection-moulded thermoplastic, customizable flame retardant materials, consistent with UL94-V0 self-extinguishing.		