SURFACE SOCKET PLUG BASE

QUICK CONNECT, MINI, STANDARD & DOUBLE

QUICK CONNECT FEATURES & BENEFITS

- Tool-free wiring
- Domestic and commercial grade
- Suitable for 1.0 – 2.5mm2 TPS cable
- Surface mounting
- 5 Year warranty

MINI, STANDARD & DOUBLE FEATURES & BENEFITS

- Large Terminals - Faster, easier wiring
- Transparent base - Easy visual inspection
- Mini - Suitable for 70mm downlight holes
- Standard & Double - Suitable for 90mm downlight holes
- Surface mounting
- 5 Year warranty

SPECIFICATIONS

Material:

- Polycarbonate (& PA6 Nylon for Quick Connect)

Colour:

- Electrical white cover with transparent base*

Rating:

- 10Amp, 250Vac

Connection:

- 2 or 3 Pin Plug connection
- 4 terminal wire connection (Not Quick Connect)

Size:

- Quick Connect - 70mm Long x 47mm high x 47mm wide
- Standard - 65mm diameter x 55mm high
- Mini – 60mm diameter x 50mm high
- Double - 125mm Long x 75mm Wide x 50mm high

Installation:


- Indoors

Fixing Method:


- Screw or cable tie


Standards:


- AS/NZS 3112:2017 +A1 & AS/NZS 3100:2022 (& AS/NZS 60998.2.3:2012 for Quick Connect)
- SAA Tested and Certified



*No transparent base for the Quick Connect.

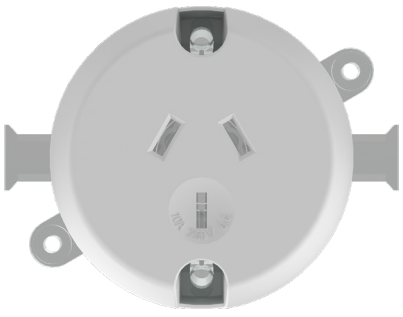

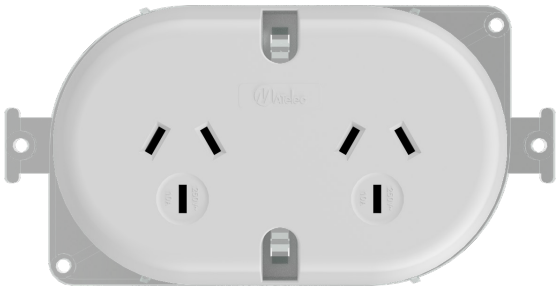



SURFACE SOCKET PLUG BASE - QUICK CONNECT, MINI, STANDARD & DOUBLE

Code	Description	Packing	MOQ	Ctn
PB-10A/QC	Quick Connect Surface Socket Outlet, 10A, 250VAC, 3PIN	10	10	200
PB-10A/SGL	Standard Single Surface Socket Outlet, 10A, 250VAC, 3PIN	10	10	100
PB-10A/SGL-M	Mini Single Surface Socket Outlet, 10A, 250VAC, 3PIN	10	10	100
PB-10A/DBL	Double Surface Socket Outlet, 10A, 250VAC, 3PIN	1	10	100