

## 100A Single Phase Type A 2 Pole 6kA 300mA RCD

Product Ref: **100A4P300AT**


### Technical Features:

- Insulated DIN rail clips
- Sensitivity 300mA (6kA)
- Test 'T' operating test button on the front panel
- Fault tripping indicator window



## Product Specification

Bidirectional	Yes
Type	Type A
Voltage Rating	415V
Current Rating	100A
IP Rating	IP20
Weight	0.344kg
Incoming Terminal Capacity	35mm <sup>2</sup>
Number of Modules	4
Number of Poles	4 Pole
Outgoing Terminal Capacity	35mm <sup>2</sup>
Torque Settings	2.5Nm
Short Circuit Rating	6kA
Tripping Sensitivity	300mA
RCD Type	A
Mounting	Din Rail
Material	Plastic
Colour	Grey/Blue
Compliance	UKCA, CE
Guarantee	1 Year
Standards	IEC 61008-1
Depth	65mm
Height	82.5mm
Width	72mm

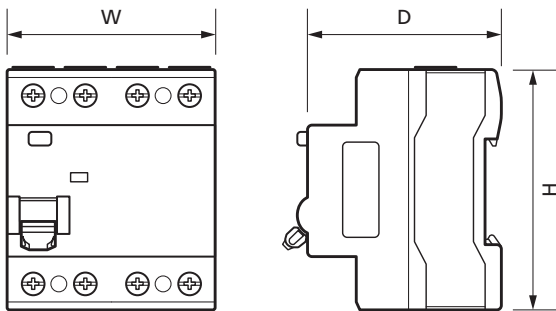

Type A - Ai



Errors and omissions excepted (E&OE). All information is subject to change without notice and is correct at the time of print. Refer to issue number and date below.

Tel: +44 (0)1302 342 642 • [mcg.co.uk](http://mcg.co.uk) • [X@mcg\\_industrial](mailto:info@mcg_industrial)