

10A 3 Phase Single Pole 10kA B Curve MCB

Product Ref: **10A1PB10**


Technical Features:

- Insulated DIN rail clips
- Fault tripping indicator window
- Ergonomic hand grip for easy installation



Product Specification

| | |
|-----------------------------|-------------------|
| Bidirectional | Yes |
| Voltage Rating | 230V |
| Current Rating | 10A |
| Weight | 0.108kg |
| Incoming Terminal Capacity | 25mm ² |
| Number of Modules | 1 |
| Number of Poles | Single Pole |
| Outgoing Terminal Capacity | 25mm ² |
| Short Circuit Rating | 10kA |
| Tripping Characteristics | B Curve |
| Operating Temperature Range | -25 - +40°C |
| Torque Settings | 2Nm |
| Mounting | Din Rail |
| Colour | Grey/Blue |
| Material | Plastic / Metal |
| Compliance | UKCA, CE |
| Guarantee | 1 Year |
| Standards | IEC/EN 60898-1 |
| Depth | 66mm |
| Height | 82.5mm |
| Width | 18mm |

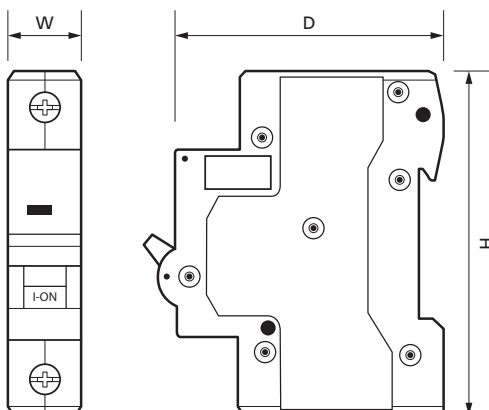

Errors and omissions excepted (E&OE). All information is subject to change without notice and is correct at the time of print. Refer to issue number and date below.

Tel: +44 (0)1302 342 642 • mcg.co.uk • [X@mcg_industrial](mailto:info@mcg_industrial)