

125A 3 Phase 3 Pole Incoming Isolator

Product Ref: **125A3PI**


Technical Features:

- Suitable for isolation to IEC 60947-3
- Insulated DIN rail clips
- Ergonomic hand grip for easy installation
- New RED switch for clearer indication



Product Specification

Bidirectional	Yes
Voltage Rating	400V
Current Rating	125A
Weight	0.237kg
Incoming Terminal Capacity	35mm ²
Number of Modules	3
Number of Poles	3 Pole
Outgoing Terminal Capacity	35mm ²
Torque Settings	3.5Nm
Mounting	DIN Rail
Colour	Grey/Red
Material	Plastic / Metal
Compliance	UKCA, CE
Guarantee	1 Year
Standards	IEC/EN 60947-3
Depth	66mm
Height	82.5mm
Width	54mm

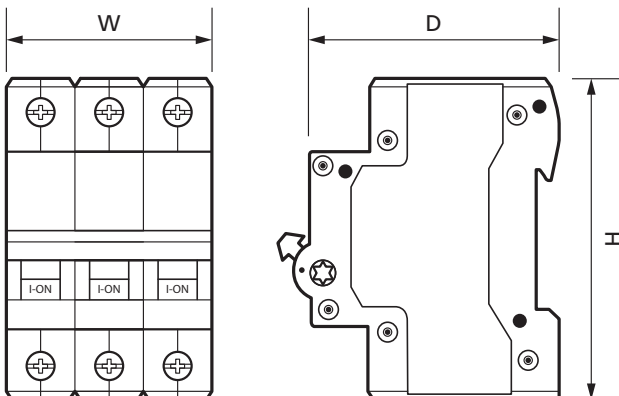

Errors and omissions excepted (E&OE). All information is subject to change without notice and is correct at the time of print. Refer to issue number and date below.

Tel: **+44 (0)1302 342 642** • mcg.co.uk • [X@mcg_industrial](mailto:info@mcg_industrial)