


## 16A 3 Phase Type A 3 Module C Curve 3P+N 10kA 30mA RCBO

Combined Earth Fault/Leakage Current  
& Short Circuit Overload Protection Device

Product Ref: **16A3P30CTPTP**

### Technical Features:

- For use within Vertical Busbar Distribution Units (See MCG TPNR 3 Phase Distribution Boards)
- Three module 3P+N
- 30mA RCD Sensitivity, 10kA Short Circuit Capacity
- RCD Test Button (Test Six Monthly)
- Fault Trip Indication, DIN Rail Mounting
- Supplied with single Neutral Cable
- Ergonomic Hand Grip
- Insulated Din Rail Clips
- Padlockable Handle

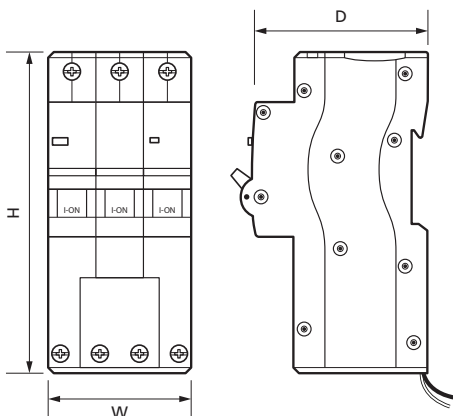

## Product Specification

Bidirectional	No
Voltage Rating	400V
Frequency	50/60Hz
Current Rating	16A
Weight	0.468kg
Incoming Terminal Capacity	25mm <sup>2</sup>
Number of Modules	3
Number of Poles	3P+N
Outgoing Terminal Capacity	25mm <sup>2</sup>
Torque Settings	2Nm (L/N out) / 2Nm (L in)
Short Circuit Rating	10kA
Tripping Characteristics	C Curve
Tripping Sensitivity	30mA
RCD Type	A
Operating Temperature Range	-5°C - +40°C
Mounting	DIN Rail
Test Button	Yes
Test Frequency	6 Months
Storage Temperature	-25°C - +70°C
IP Rating	IP20
Colour	Grey/Blue
Material	Plastic / Metal
Compliance	UKCA, CE
Guarantee	1 Year
Standards	IEC 61009-1
Depth	66.7mm
Height	112mm
Width	53.4mm

Errors and omissions excepted (E&OE). All information is subject to change without notice and is correct at the time of print. Refer to issue number and date below.

Tel: +44 (0)1302 342 642 • mcg.co.uk • @mcg\_industrial