

## 16A 3 Phase 3 Module 3 Pole 10kA C Curve MCB

Product Ref: **16A3PC10**


### Technical Features:

- Insulated DIN rail clips
- Fault tripping indicator window
- Ergonomic hand grip for easy installation



## Product Specification

|                             |                   |
|-----------------------------|-------------------|
| Bidirectional               | Yes               |
| Voltage Rating              | 400V              |
| Current Rating              | 16A               |
| Weight                      | 0.324kg           |
| Incoming Terminal Capacity  | 25mm <sup>2</sup> |
| Number of Modules           | 3                 |
| Number of Poles             | 3 Pole            |
| Outgoing Terminal Capacity  | 25mm <sup>2</sup> |
| Short Circuit Rating        | 10kA              |
| Tripping Characteristics    | C Curve           |
| Operating Temperature Range | -25 - +40°C       |
| Torque Settings             | 2Nm               |
| Mounting                    | Din Rail          |
| Colour                      | Grey/Blue         |
| Material                    | Plastic / Metal   |
| Compliance                  | UKCA, CE          |
| Guarantee                   | 1 Year            |
| Standards                   | IEC/EN 60898-1    |
| Depth                       | 66mm              |
| Height                      | 82.5mm            |
| Width                       | 54mm              |

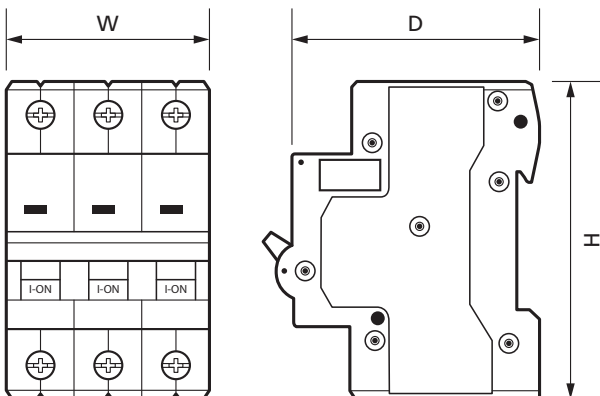

Errors and omissions excepted (E&OE). All information is subject to change without notice and is correct at the time of print. Refer to issue number and date below.

Tel: **+44 (0)1302 342 642** • [mcg.co.uk](http://mcg.co.uk) • [✉@mcg\\_industrial](mailto:info@mcg_industrial)