


1 Module SPD Single Phase Type 2 + 3 Surge Protection device

Product Ref: **20KASPD1M**

Technical Features:

- Ideal for domestic applications
- End of module life indication
- Suitable for TN-C-S and TT systems
- No earth leakage (can be placed either side of RCDs)
- Pluggable and replaceable modules
- Use 16A to 32A backup MCB (sold separately)
- Suitable for use with any brand of consumer unit
- Conforms to IEC 61643-1 and EN 61643-11
- Compliant to 18th Edition Wiring Regulations (BS 7671:2018 Surge Protection)

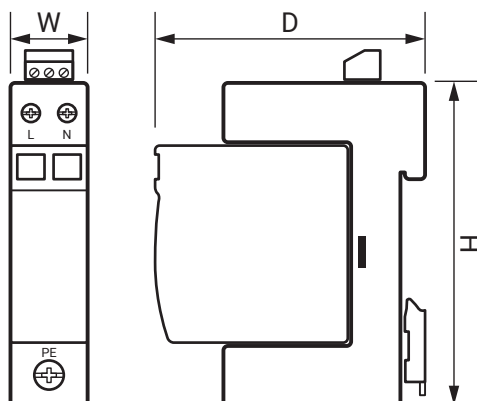

Product Specification

Voltage Rating	230V
Rated Voltage (Max Continuous Voltage)	275V (L-N) 255V (N-PE)
Voltage Protection level at In	1.2kV (L-N) 1.0kV (N-PE)
IP Rating	IP20
Weight	0.105kg
Number of Modules	1
Mounting	DIN Rail
Nominal discharge current (8/20)	10kA
Max discharge current (8/20)	20kA
Incoming Terminal Capacity	4 - 16mm ²
Outgoing Terminal Capacity	4 - 16mm ²
Torque Settings	1.2Nm (L/N) 2.0Nm (PE)
Operating Temperature Range	-40 - +80°C
Remote Signalling Contact	Switching Contact (NO/NC)
Colour	Grey
Compliance	UKCA, CE
Guarantee	1 Year
Standards	BS 7671:2018, IEC 61643-1, EN 61643-11
Suitable for	TN-C-S and TT Earthing
SPD Type	2 + 3
Depth	70mm
Height	90mm
Width	18mm

Errors and omissions excepted (E&OE). All information is subject to change without notice and is correct at the time of print. Refer to issue number and date below.

Tel: +44 (0)1302 342 642 • mcg.co.uk • X@mcg_industrial