

25A Single Phase Type A 4 Pole 6kA 30mA RCD

Product Ref: **25A4P30AT**


Technical Features:

- Insulated DIN rail clips
- Sensitivity 30mA (6kA)
- Test 'T' operating test button on the front panel
- Fault tripping indicator window



Product Specification

Bidirectional	Yes
Type	Type A
Voltage Rating	415V
Current Rating	25A
IP Rating	IP20
Weight	0.330kg
Incoming Terminal Capacity	35mm ²
Number of Modules	4
Number of Poles	4 Pole
Outgoing Terminal Capacity	35mm ²
Torque Settings	2.5Nm
Short Circuit Rating	6kA
Tripping Sensitivity	30mA
RCD Type	A
Mounting	Din Rail
Material	Plastic
Colour	Grey/Blue
Compliance	UKCA, CE
Guarantee	1 Year
Standards	IEC 61008-1
Depth	65mm
Height	82.5mm
Width	72mm

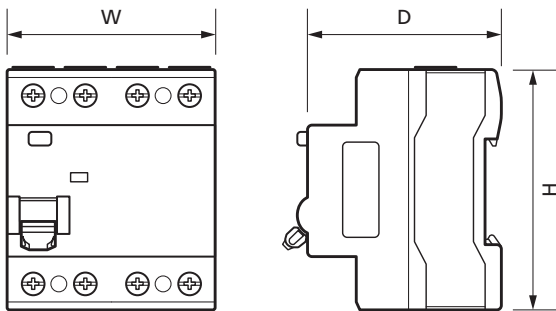

Type A - Ai



Errors and omissions excepted (E&OE). All information is subject to change without notice and is correct at the time of print. Refer to issue number and date below.

Tel: +44 (0)1302 342 642 • mcg.co.uk • @mcg_industrial