

## 32A 3 Pole 10kA B Curve MCB

Product Ref: **32A3PB10/TP**


### Technical Features:

- Insulated DIN rail clips
- Fault tripping indicator window
- Ergonomic hand grip for easy installation
- Only for use in conjunction with MCG SPD protection unit (TPN-T2SPD)



## Product Specification

Voltage Rating	400V
Current Rating	32A
Weight	0.450kg
Incoming Terminal Capacity	25mm <sup>2</sup>
Number of Modules	3
Number of Poles	3 Pole
Outgoing Terminal Capacity	25mm <sup>2</sup>
Short Circuit Rating	10kA
Tripping Characteristics	B Curve
Mounting	Din Rail
Colour	Grey/Black
Torque Setting	2Nm
Material	Plastic / Metal
Compliance	UKCA, CE, Semko
Guarantee	1 Year
Standards	IEC/BS EN 60898-1
Depth	76mm
Height	83mm
Width	54mm

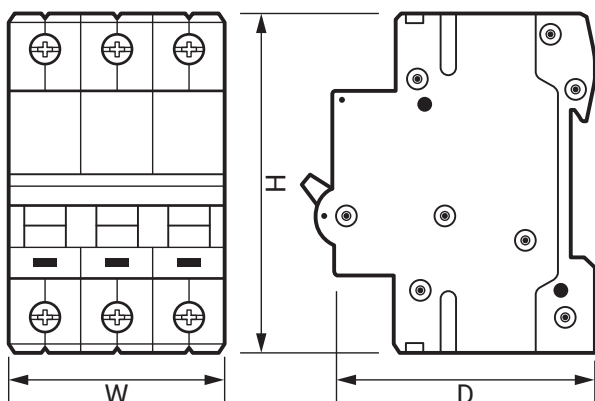

Errors and omissions excepted (E&OE). All information is subject to change without notice and is correct at the time of print. Refer to issue number and date below.

Tel: +44 (0)1302 342 642 • [mcg.co.uk](http://mcg.co.uk) • [X@mcg\\_industrial](mailto:info@mcg_industrial)