

## 40A 3 Phase 2 Module 2 Pole 10kA D Curve MCB


Product Ref: **40A2PD10**

### Technical Features:

- Insulated DIN rail clips
- Fault tripping indicator window
- Ergonomic hand grip for easy installation

## Product Specification

Bidirectional	Yes
Voltage Rating	400V
Current Rating	40A
Weight	0.222kg
Incoming Terminal Capacity	25mm <sup>2</sup>
Number of Modules	2
Number of Poles	2 Pole
Outgoing Terminal Capacity	25mm <sup>2</sup>
Short Circuit Rating	10kA
Tripping Characteristics	D Curve
Operating Temperature Range	-25 - +40°C
Torque Settings	2Nm
Mounting	Din Rail
Colour	Grey/Blue
Material	Plastic / Metal
Compliance	UKCA, CE
Guarantee	1 Year
Standards	IEC/EN 60898-1
Depth	66mm
Height	82.5mm
Width	36mm

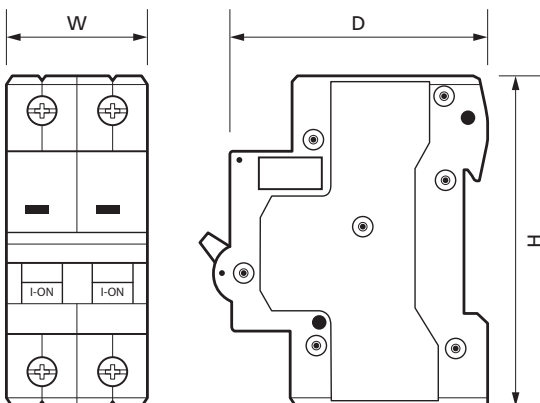

Errors and omissions excepted (E&OE). All information is subject to change without notice and is correct at the time of print. Refer to issue number and date below.

Tel: **+44 (0)1302 342 642** • [mcg.co.uk](http://mcg.co.uk) • [X@mcg\\_industrial](https://www.instagram.com/mcg_industrial)