


50A 3 Phase Type A 1 Module C Curve 1P+N 10kA 30mA RCBO

Product Ref: **50A2P30CSMTP**

Technical Features:

- Insulated DIN rail clips
- Sensitivity 30mA (10kA)
- Test 'T' operating test button on the front panel
- Fault tripping indicator window
- Complete with 1000mm Neutral and Earth cables
- Ergonomic hand grip for easy installation

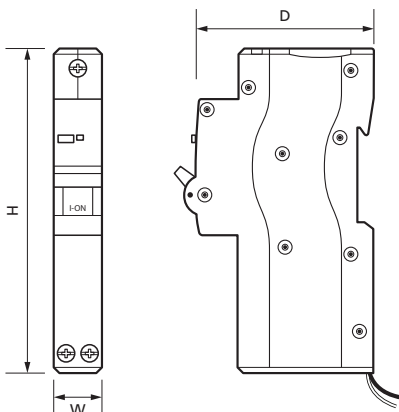

Product Specification

| | |
|-----------------------------|------------------------------|
| Bidirectional | No |
| Voltage Rating | 230V |
| Current Rating | 50A |
| Weight | 0.230kg |
| Incoming Terminal Capacity | 16mm ² |
| Number of Modules | 1 |
| Number of Poles | 1P+N |
| Outgoing Terminal Capacity | 16mm ² |
| Torque Settings | 1.2Nm (L/N out) / 2Nm (L in) |
| Short Circuit Rating | 10kA |
| Tripping Characteristics | C Curve |
| Tripping Sensitivity | 30mA |
| RCD Type | A |
| Operating Temperature Range | -25 - +40°C |
| Mounting | Din Rail |
| Colour | Grey/Blue |
| Material | Plastic / Metal |
| Compliance | UKCA, CE |
| Guarantee | 1 Year |
| Standards | IEC 61009-1 |
| Depth | 67mm |
| Height | 112mm |
| Width | 18mm |

Errors and omissions excepted (E&OE). All information is subject to change without notice and is correct at the time of print. Refer to issue number and date below.

Tel: +44 (0)1302 342 642 • mcg.co.uk • [✉@mcg_industrial](mailto:info@mcg_industrial)