

## 50A Double Pole Bidirectional Type A 10kA 30mA 2 Module C Curve RCBO

Product Ref: **50ADP30CAT**


### Technical Features:

- Bidirectional
- Compact design allows for easier installation
- Commercial and residential applications such as EV charging units or air source heat pumps
- Two Module device that protects both live and neutral conductors
- Protection device combines the overcurrent function of an MCB with earth fault function of an RCD
- DIN rail mountable
- Incoming cables can be connected either at the top or the bottom
- Test button and trip indicator



## Product Specification

Bidirectional	Yes
Voltage Rating	230V
Current Rating	50A
Weight	0.250kg
Incoming Terminal Capacity	25mm <sup>2</sup>
Number of Modules	2
Number of Poles	2P
Outgoing Terminal Capacity	25mm <sup>2</sup>
Torque Settings	2Nm
Short Circuit Rating	10kA
Tripping Characteristics	C Curve
Tripping Sensitivity	30mA
RCD Type	A
Mounting	Din Rail
Colour	Grey/Blue
Material	Plastic / Metal
Compliance	UKCA, CE
Guarantee	1 Year
Standards	BS EN 61009-1
Depth	66mm
Height	82.5mm
Width	36mm

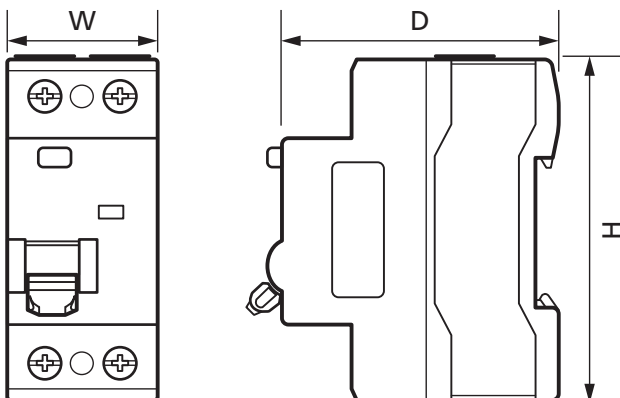

Errors and omissions excepted (E&OE). All information is subject to change without notice and is correct at the time of print. Refer to issue number and date below.

Tel: **+44 (0)1302 342 642** • [mcg.co.uk](http://mcg.co.uk) • [X@mcg\\_industrial](mailto:info@mcg_industrial)