


63A 3 Phase Type A 3 Module C Curve 3P+N 10kA 30mA RCBO

Combined Earth Fault/Leakage Current
& Short Circuit Overload Protection Device

Product Ref: **63A3P30CTPTP**

Technical Features:

- For use within Vertical Busbar Distribution Units (See MCG TPNR 3 Phase Distribution Boards)
- Three module 3P+N
- 30mA RCD Sensitivity, 10kA Short Circuit Capacity
- RCD Test Button (Test Six Monthly)
- Fault Trip Indication, DIN Rail Mounting
- Supplied with single Neutral Cable
- Ergonomic Hand Grip
- Insulated Din Rail Clips
- Padlockable Handle

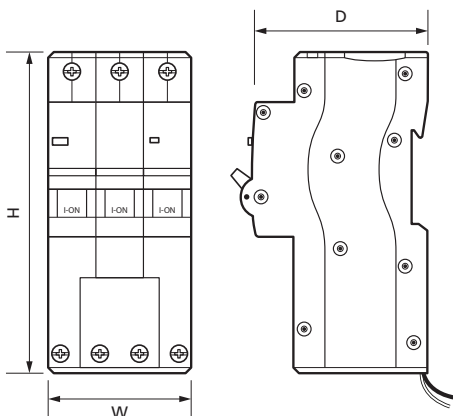

Product Specification

| | |
|-----------------------------|----------------------------|
| Bidirectional | No |
| Voltage Rating | 400V |
| Frequency | 50/60Hz |
| Current Rating | 63A |
| Weight | 0.537kg |
| Incoming Terminal Capacity | 25mm ² |
| Number of Modules | 3 |
| Number of Poles | 3P+N |
| Outgoing Terminal Capacity | 25mm ² |
| Torque Settings | 2Nm (L/N out) / 2Nm (L in) |
| Short Circuit Rating | 10kA |
| Tripping Characteristics | C Curve |
| Tripping Sensitivity | 30mA |
| RCD Type | A |
| Operating Temperature Range | -5°C - +40°C |
| Mounting | DIN Rail |
| Test Button | Yes |
| Test Frequency | 6 Months |
| Storage Temperature | -25°C - +70°C |
| IP Rating | IP20 |
| Colour | Grey/Blue |
| Material | Plastic / Metal |
| Compliance | UKCA, CE |
| Guarantee | 1 Year |
| Standards | IEC 61009-1 |
| Depth | 66.7mm |
| Height | 112mm |
| Width | 53.4mm |

Errors and omissions excepted (E&OE). All information is subject to change without notice and is correct at the time of print. Refer to issue number and date below.

Tel: +44 (0)1302 342 642 • mcg.co.uk • @mcg_industrial