


## 6A 3 Phase Type A 1 Module C Curve 1P+N 10kA 30mA RCBO

Product Ref: **6A2P30CSMTP**

### Technical Features:

- Insulated DIN rail clips
- Sensitivity 30mA (10kA)
- Test 'T' operating test button on the front panel
- Fault tripping indicator window
- Complete with 1000mm Neutral and Earth cables
- Ergonomic hand grip for easy installation

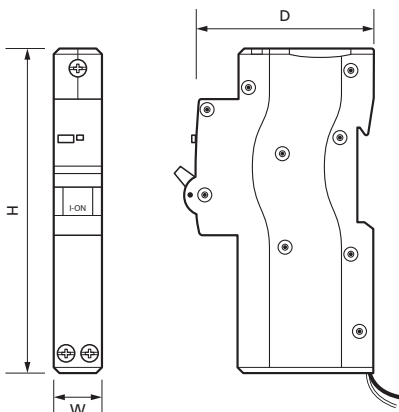

## Product Specification

Bidirectional	No
Voltage Rating	230V
Current Rating	6A
Weight	0.181kg
Incoming Terminal Capacity	16mm <sup>2</sup>
Number of Modules	1
Number of Poles	1P+N
Outgoing Terminal Capacity	16mm <sup>2</sup>
Torque Settings	1.2Nm (L/N out) / 2Nm (L in)
Short Circuit Rating	10kA
Tripping Characteristics	C Curve
Tripping Sensitivity	30mA
RCD Type	A
Operating Temperature Range	-25 - +40°C
Mounting	Din Rail
Colour	Grey/Blue
Material	Plastic / Metal
Compliance	UKCA, CE
Guarantee	1 Year
Standards	IEC 61009-1
Depth	67mm
Height	112mm
Width	18mm

Errors and omissions excepted (E&OE). All information is subject to change without notice and is correct at the time of print. Refer to issue number and date below.

Tel: +44 (0)1302 342 642 • [mcg.co.uk](http://mcg.co.uk) • [X@mcg\\_industrial](mailto:info@mcg_industrial)