

6A Double Pole Bidirectional Type A 10kA 30mA 2 Module C Curve RCBO

Product Ref: **6ADP30CAT**


Technical Features:

- Bidirectional
- Compact design allows for easier installation
- Commercial and residential applications such as EV charging units or air source heat pumps
- Two Module device that protects both live and neutral conductors
- Protection device combines the overcurrent function of an MCB with earth fault function of an RCD
- DIN rail mountable
- Incoming cables can be connected either at the top or the bottom
- Test button and trip indicator



Product Specification

| | |
|----------------------------|-------------------|
| Bidirectional | Yes |
| Voltage Rating | 230V |
| Current Rating | 6A |
| Weight | 0.234kg |
| Incoming Terminal Capacity | 25mm ² |
| Number of Modules | 2 |
| Number of Poles | 2P |
| Outgoing Terminal Capacity | 25mm ² |
| Torque Settings | 2Nm |
| Short Circuit Rating | 10kA |
| Tripping Characteristics | C Curve |
| Tripping Sensitivity | 30mA |
| RCD Type | A |
| Mounting | Din Rail |
| Colour | Grey/Blue |
| Material | Plastic / Metal |
| Compliance | UKCA, CE |
| Guarantee | 1 Year |
| Standards | BS EN 61009-1 |
| Depth | 66mm |
| Height | 82.5mm |
| Width | 36mm |

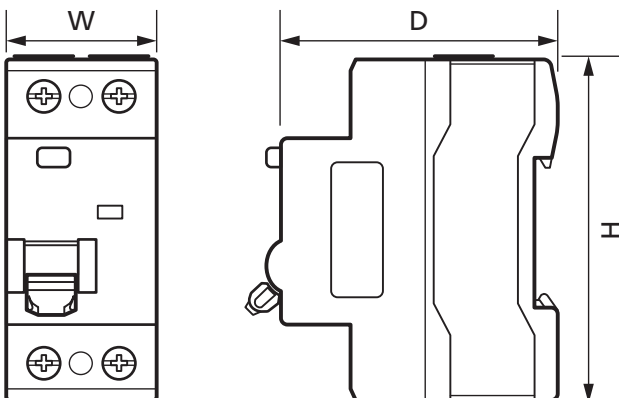

Errors and omissions excepted (E&OE). All information is subject to change without notice and is correct at the time of print. Refer to issue number and date below.

Tel: +44 (0)1302 342 642 • mcg.co.uk • [✉@mcg_industrial](mailto:info@mcg_industrial)