

16A 3P+N+E 415V Interlocked Switched Socket c/w RCD Compartment IP44 **Product Specification**

Product Ref:


CX165P415SISCOMP

Technical Features:

- Suitable for small commercial and industrial applications
- Conforms to EN 60309-1/2/4
- Built in RCD compartment (RCD not supplied)
- Corrosion and impact resistant
- Colour coded for fast identification of operating voltage
- Safe and reliable
- Padlockable handle and RCD compartment



Voltage Rating	415V
Current Rating	16A
IP Rating	IP44
Weight	1.155kg
Frequency	50Hz
Number of Poles	3P+N+E
Mounting	Surface Mount - Vertical
Cable Entry	Knockouts (M20 and M25)
Internal Cable Size	2.5mm ²
Isolator	Yes
Operating Temperature Range	-25 - +40°
Number of Module spaces	6 Unpopulated
Colour	Red
Material	Thermoplastic
UV Resistant	Yes
Supplied With	M20 and M25 compression glands
Compliance	UKCA, CE, RoHS and REACH
Guarantee	1 Year
Standards	EN 60309-1/2/4
Depth	121mm
Height	255mm
Width	166mm

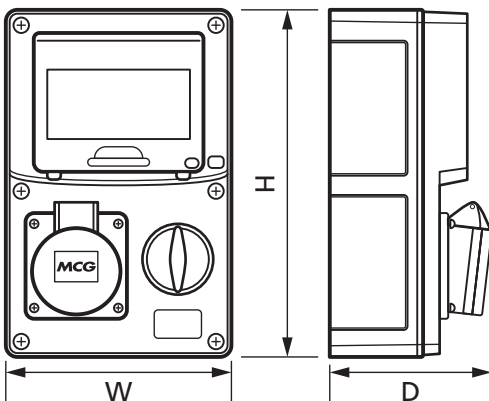

Errors and omissions excepted (E&OE). All information is subject to change without notice and is correct at the time of print. Refer to issue number and date below.

Tel: +44 (0)1302 342 642 • mcg.co.uk • X@mcg_industrial