

16A 2P+E 110V Plug IP44

Product Ref: **CXN163P110P**


Technical Features:

- Manufactured from thermoplastic - suitable for general use
- Conforms to IEC/EN 60309-1/2
- Quick release feature
- Fast and simple assembly and wiring, cuts time and costs
- Ergonomic grip
- Corrosion and impact resistant
- Colour coded for fast identification of operating voltage
- Safe and reliable
- Typical operating temperature -25°C to +50°C
- Screwless cable grip



Product Specification

| | |
|----------------------------|------------------------|
| Voltage Rating | 110V |
| Current Rating | 16A |
| IP Rating | IP44 |
| Frequency | 50Hz |
| Weight | 0.113kg |
| Number of Poles | 2P+E |
| Terminal size (Range) | 1 - 2.5mm ² |
| Torque | 0.8Nm |
| Mounting | Trailing |
| Cable Entry | Compression Gland |
| Clamping range (min - max) | 7 - 15.5mm |
| Colour | Yellow |
| Material | Thermoplastic |
| Compliance | UKCA, CE |
| Guarantee | 1 Year |
| Standards | IEC/EN 60309-1/2 |
| Diameter Ø | 51mm |
| Height | 58mm |
| Length | 124mm |

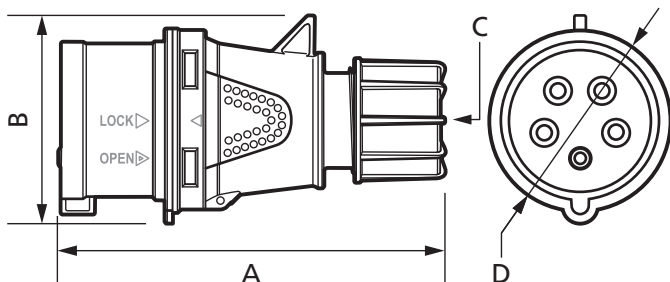

| A | B | C | D |
|-------|------|--------|------|
| 124mm | 58mm | 15.5mm | 51mm |

Errors and omissions excepted (E&OE). All information is subject to change without notice and is correct at the time of print. Refer to issue number and date below.

Tel: +44 (0)1302 342 642 • mcg.co.uk • [X@mcg_industrial](mailto:info@mcg_industrial)