
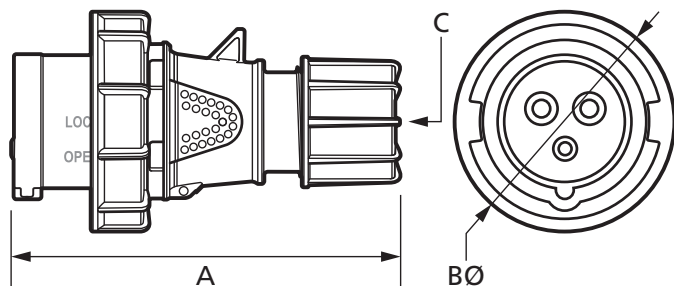


## 32A 3P+N+E 415V Plug IP67

Product Ref: **CXN325P415P67A**

### Technical Features:

- Manufactured from thermoplastic - suitable for general use
- Conforms to IEC/EN 60309-1/2
- Quick release feature
- Fast and simple assembly and wiring, cuts time and costs
- Ergonomic grip
- Corrosion and impact resistant
- Colour coded for fast identification of operating voltage
- Safe and reliable
- Typical operating temperature -25°C to +50°C
- Screwless cable grip

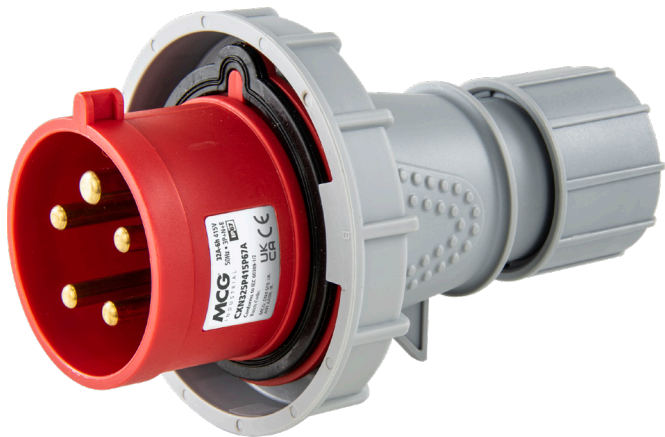

## Product Specification

Voltage Rating	415V
Current Rating	32A
IP Rating	IP67
Weight	0.278kg
Frequency	50Hz
Number of Poles	3P+N+E
Terminal size (Range)	2.5 - 6mm <sup>2</sup>
Torque	1.2Nm
Mounting	Trailing
Cable Entry	Compression Gland
Clamping range (min - max)	11 - 22mm
Colour	Red
Material	Thermoplastic
Compliance	UKCA, CE
Guarantee	1 Year
Standards	IEC/EN 60309-1/2
Diameter Ø	100.5mm
Length	159.5mm

A	B Ø	C
159.5mm	100.5mm	22mm

Errors and omissions excepted (E&OE). All information is subject to change without notice and is correct at the time of print. Refer to issue number and date below.

Tel: +44 (0)1302 342 642 • mcg.co.uk • [X@mcg\\_industrial](mailto:info@mcg_industrial)