

## 63A 3P+N+E 415V Coupler IP67

Product Ref: **CXN635P415C67**


### Technical Features:

- Manufactured from thermoplastic - suitable for general use
- Conforms to IEC/EN 60309-1/2
- Quick release feature
- Fast and simple assembly and wiring, cuts time and costs
- Ergonomic grip
- Corrosion and impact resistant
- Colour coded for fast identification of operating voltage
- Safe and reliable
- Typical operating temperature -25°C to +50°C
- Screwless cable grip



## Product Specification

Voltage Rating	415V
Current Rating	63A
IP Rating	IP67
Weight	0.808kg
Frequency	50Hz
Number of Poles	3P+N+E
Terminal size (Range)	6 - 16mm <sup>2</sup>
Torque	2.0 / 0.8Nm (Pilot Pin)
Mounting	Trailing
Cable Entry	Compression Gland
Clamping range (min - max)	14 - 32mm
Colour	Red
Material	Thermoplastic
Compliance	UKCA, CE
Guarantee	1 Year
Standards	IEC/EN 60309-1/2
Diameter Ø	111mm
Height	113.5mm
Length	270mm

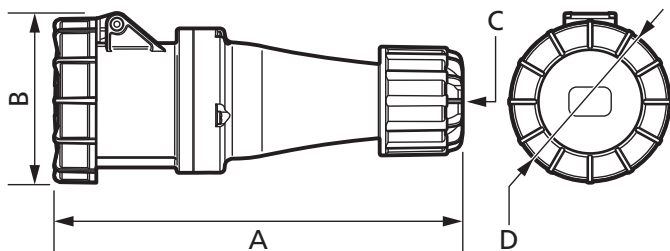

A	B	C	D
270mm	113.5mm	32mm	111mm

Errors and omissions excepted (E&OE). All information is subject to change without notice and is correct at the time of print. Refer to issue number and date below.

Tel: +44 (0)1302 342 642 • mcg.co.uk • @mcg\_industrial