

63A 3P+N+E 415V Plug IP67

Product Ref: **CXN635P415P67**


Technical Features:

- Manufactured from thermoplastic - suitable for general use
- Conforms to IEC/EN 60309-1/2
- Quick release feature
- Fast and simple assembly and wiring, cuts time and costs
- Ergonomic grip
- Corrosion and impact resistant
- Colour coded for fast identification of operating voltage
- Safe and reliable
- Typical operating temperature -25°C to +50°C
- Screwless cable grip



Product Specification

| | |
|----------------------------|-------------------------|
| Voltage Rating | 415V |
| Current Rating | 63A |
| IP Rating | IP67 |
| Weight | 0.732kg |
| Frequency | 50Hz |
| Number of Poles | 3P+N+E |
| Terminal size (Range) | 6 - 16mm ² |
| Torque | 2.0 / 0.8Nm (Pilot Pin) |
| Mounting | Trailing |
| Cable Entry | Compression Gland |
| Clamping range (min - max) | 14 - 32mm |
| Colour | Red |
| Material | Thermoplastic |
| Compliance | UKCA, CE |
| Guarantee | 1 Year |
| Standards | IEC/EN 60309-1/2 |
| Diameter Ø | 113.5mm |
| Length | 260mm |

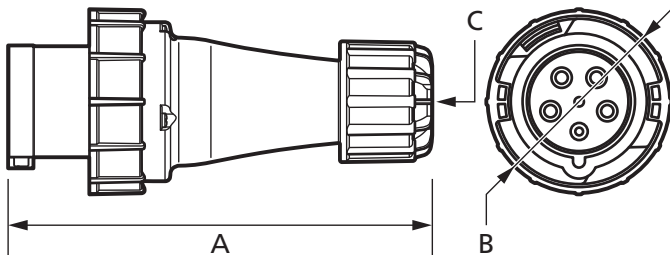

| A | B Ø | C |
|-------|---------|------|
| 260mm | 113.5mm | 32mm |

Errors and omissions excepted (E&OE). All information is subject to change without notice and is correct at the time of print. Refer to issue number and date below.

Tel: +44 (0)1302 342 642 • mcg.co.uk • @mcg_industrial