

## 4kW Mini Contactor

3 Pole 3NO Contacts 1NC Auxiliary 240V Coil

Product Ref: **DL09-30-01 240V**


### Technical Features:

- Simple and robust construction
- High mechanical and electrical life
- Coil fitted as standard
- For DIN rail or panel mounting
- Cage type cable terminals
- Note: Overloads or contact blocks are not available for mini contactors



## Product Specification

Voltage Rating	660V
Current Rating AC1	20A
Current Rating AC3	9A
kW Rating	4kW
Weight	0.182kg
Frequency	50/60Hz
Number of Poles	3 Pole
Mounting	DIN Rail / Screw Mounting
Coil Voltage	240V AC
Contact Configuration	3 NO
Auxiliary Contact	1 NC
hp rating	5.5 metric hp
Colour	Black/Grey
Material	Metal/Plastic
Compliance	UKCA, CE
Guarantee	1 Year
Standards	IEC 60947-4-1
Type	DL09
Suitable for	Heating, Motor and Lighting Loads
Depth	58mm
Height	53mm
Width	45mm

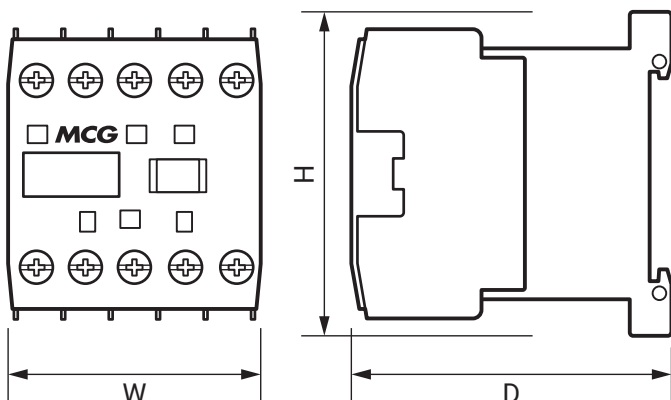

Errors and omissions excepted (E&OE). All information is subject to change without notice and is correct at the time of print. Refer to issue number and date below.

Tel: +44 (0)1302 342 642 • mcg.co.uk • X @mcg\_industrial