

7 to 10A Thermal Overload Relay



Product Ref: **DL2-10**

Technical Features:

- Manual/automatic reset
- Red stop plunger
- Adjustable overload range
- 1NO and 1NC auxiliary as standard
- Suitable for direct mounting onto contactor

Product Specification

| | |
|-----------------|--|
| Overload Rating | 7 - 10A |
| Mounting | Contactors / Optional Mounting Bracket |
| Weight | 0.160kg |
| Frequency | 50/60Hz |
| Colour | Black/Grey |
| Material | Metal/Plastic |
| Compliance | UKCA, CE |
| Guarantee | 1 Year |
| Standards | IEC 60947-4-1 |
| Suitable for | DL Range of Contactors |
| Depth | 89mm |
| Height | 48mm |
| Width | 45mm |

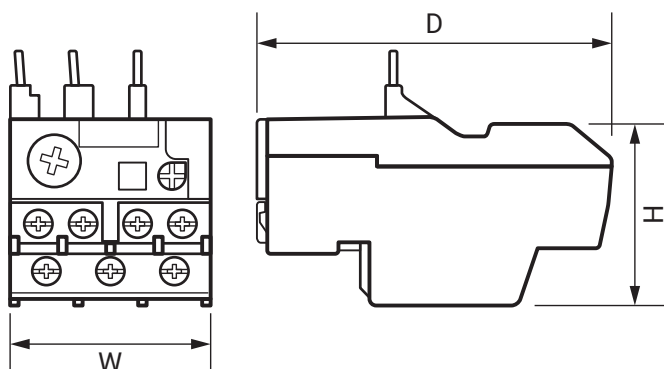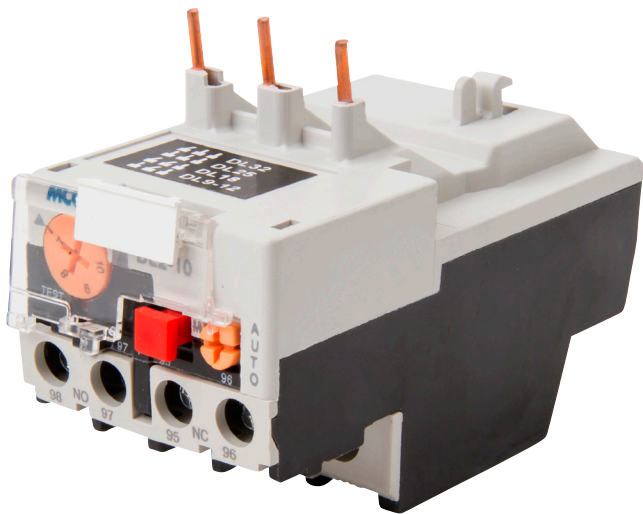

Errors and omissions excepted (E&OE). All information is subject to change without notice and is correct at the time of print. Refer to issue number and date below.

Tel: +44 (0)1302 342 642 • mcg.co.uk • [X@mcg_industrial](mailto:info@mcg_industrial)