

## 11kW Contactor

3 Pole 3NO Contacts 1NO Auxiliary 415V Coil

Product Ref: **DL25-30-10 415V**


### Technical Features:

- Simple and robust construction
- High mechanical and electrical life
- Coil fitted as standard
- For DIN rail or panel mounting
- Cage type cable terminals



## Product Specification

Voltage Rating	660V
Current Rating AC1	40A
Current Rating AC3	25A
kW Rating	11kW
Weight	0.516kg
Frequency	50/60Hz
Number of Poles	3 Pole
Mounting	DIN Rail / Screw Mounting
Coil Voltage	415V AC
Contact Configuration	3 NO
Auxiliary Contact	1 NO
hp rating	15 metric hp
Colour	Black/Grey
Material	Metal/Plastic
Compliance	UKCA, CE
Guarantee	1 Year
Standards	IEC 60947-4-1
Type	DL25
Suitable for	Heating, Motor and Lighting Loads
Depth	93mm
Height	80mm
Width	56mm

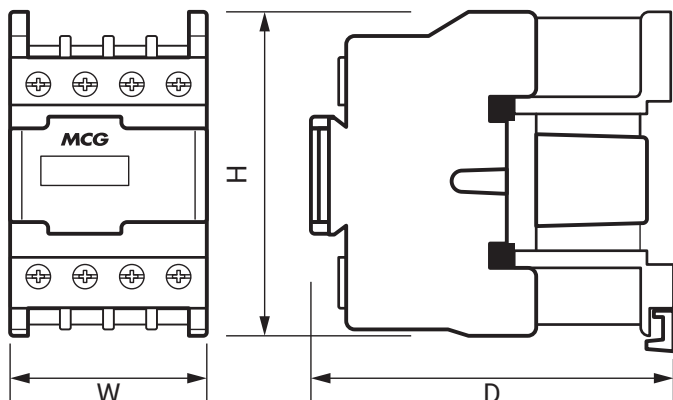

Errors and omissions excepted (E&OE). All information is subject to change without notice and is correct at the time of print. Refer to issue number and date below.

Tel: +44 (0)1302 342 642 • [mcg.co.uk](http://mcg.co.uk) • [X@mcg\\_industrial](mailto:info@mcg_industrial)