

3.7kW 240V Single-Phase Direct On Line Starter No Overload

Product Ref: **DL4 240V**


Technical Features:

- No overload fitted (sold separately)
- Large range of compatible overloads available from our MCG Industrial DL Range (part codes DL2-1.6 to DL2-25)
- Robust plastic enclosure with start/stop pushbuttons
- IP55 ingress protection
- Multiple cable entries
- Complete with DIN rail mounted pre-wired contactor
- Suitable for applications where a metal starter is not suitable such as dockside areas, poultry sheds, chemical works etc



Product Specification

| | |
|-----------------------|----------------|
| Voltage Rating | 240V |
| Current Rating AC3 | 25A |
| kW Rating | 3.7kW |
| IP Rating | IP55 |
| Weight | 0.994kg |
| Frequency | 50/60Hz |
| Number of Poles | 3 Pole |
| Mounting | Surface |
| Coil Voltage | 240V AC |
| Contact Configuration | 3 NO |
| Auxiliary Contact | 1 NO |
| Button Configuration | Start/Stop |
| hp rating | 5 metric hp |
| Overload Rating | 25A Max |
| Colour | Black/Grey |
| Material | Plastic |
| Compliance | UKCA, CE |
| Guarantee | 1 Year |
| Standards | BS 60947 |
| Type | Direct On Line |
| Depth | 134mm |
| Height | 184mm |
| Width | 103mm |

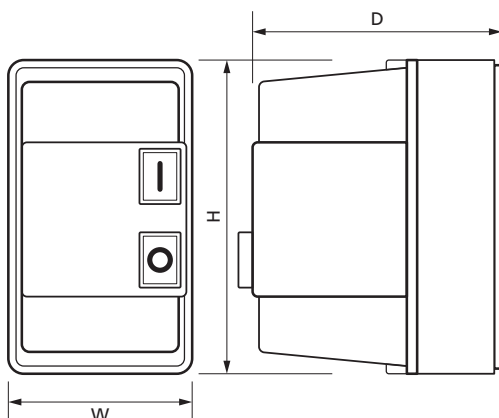

Errors and omissions excepted (E&OE). All information is subject to change without notice and is correct at the time of print. Refer to issue number and date below.

Tel: +44 (0)1302 342 642 • mcg.co.uk • [@mcg_industrial](https://twitter.com/mcg_industrial)