


Flame Retardant Meter Board 24" × 12" (600 × 300mm)

Product Ref: **FRMB2412**

Technical Features:

- Manufactured from FSC Mix 70% certified P2 flame-retardant chipboard - Thickness: 12mm
- Reaction-to-fire classification: B-s1,d0 in accordance with EN 13501-1
- Suitable for mounting electrical distribution and control equipment, including consumer units and electricity meters, in dry indoor locations
- Pre-drilled with Ø7mm mounting hole at each corner (25 × 25mm offset)
- Formaldehyde emission class E1
- Optional spacers are available separately (part code: MCGS)

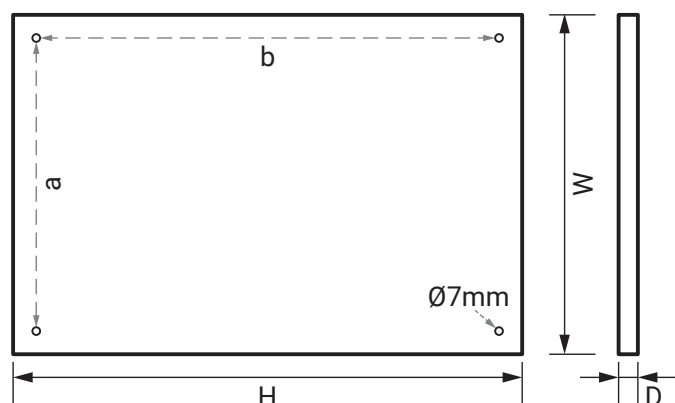

Product Specification

Material Grade	Flame Retardant (FR) Chipboard
Euroclass Rating	Class B
Reaction to Fire	B-s1,d0
Test Standards	EN 13501-1
Thickness	12mm
Pre-drilled hole dia Ø	7mm
Fixing Centres (a x b)	250 x 550mm
Weight	1.540kg
Colour	Brown
Compliance	CE
Depth	12mm
Height	600mm
Width	300mm

Errors and omissions excepted (E&OE). All information is subject to change without notice and is correct at the time of print. Refer to issue number and date below.

Tel: +44 (0)1302 342 642 • mcg.co.uk • [X@mcg-industrial](mailto:info@mcg-industrial)