


20A 2P 1 Module 2 NC Contacts Modular Contactor

Product Ref: **MC1202NC**

Technical Features:

- Suitable for application in general control, heating and lighting applications
- Available in 20A, 25A, 40A, 63A ratings up to 4 pole contacts
- Din rail mounted

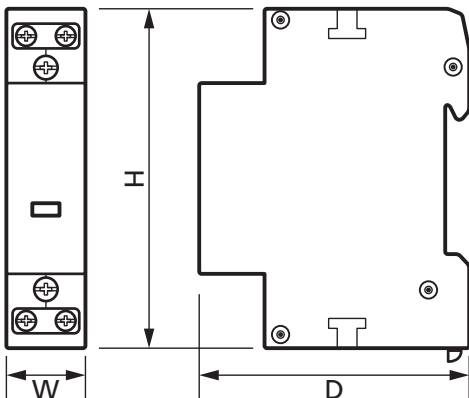

Product Specification

| | |
|---|---|
| Current Rating (A) | 20A |
| Frequency (Hz) | 50/60 Hz |
| Nominal Operating Voltage Ue (V) | 230V |
| Number of Poles | 2 Pole |
| Number of Modules | 1 |
| Contact Configuration | 2 NC |
| Coil Voltage (V) | 230V AC |
| Mechanical Endurance Switching (cycles) | 1,000,000 |
| Electrical Endurance Switching (cycles) | 250,000 |
| Consumption @230V AC (W) | ≤1.1W |
| Operating Temp Range (°C) | -5° to +60°C |
| Mounting | Din Rail - 35mm Mounting Support |
| IP Rating | IP2X |
| Rated insulation voltage Ui (V) | 400V |
| Rated impulse withstand voltage Ith (kV) | 4kV |
| AC1 / AC7a Rated operational current Ie (A) | 20A |
| AC1 / AC7a Rated operational current AT Ue = 230Vac | 4kW |
| AC3 / AC7b Rated operational current AT Ue = 230Vac | 1.2kW |
| Maximum back-up fuse | 25A gL |
| Terminal capacity - Mains | 1-6mm ² (Fine strand wire) 1-10mm ² (Solid wire) |
| Terminal screw size / Torque (Nm) | M4 / 1.2Nm (max) |
| Terminal capacity - Coil | 1-2.5mm ² (Fine strand or Solid wire) |
| Terminal screw size / Torque (Nm) | M3 / 0.6Nm (max) |
| Colour | Light Grey |
| Compliance | UKCA, CE |
| Guarantee | 1 Year |
| Standards | IEC61095 / IEC60947-4-1 |
| Weight | 0.127kg |
| Depth | 66mm |
| Height | 83mm |
| Width | 18mm |

Errors and omissions excepted (E&OE). All information is subject to change without notice and is correct at the time of print. Refer to issue number and date below.

Tel: +44 (0)1302 342 642 • mcg.co.uk • @mcg_industrial