

1 Module SPD Single Phase Type 2 Surge Protection device

Product Ref: **MCGSPD1M**


Technical Features:

- Ideal for domestic applications
- End of module life indication
- Suitable for TN-S, TN-C-S and TT earthing systems
- No earth leakage
- Pluggable and replaceable modules
- Use 32A backup MCB (sold separately)
- Suitable for use with any brand of consumer unit
- Conforms to IEC / BS EN61643-11



Product Specification

Voltage Rating	230V
Rated Voltage (Max Continuous Voltage)	275V (L-N) 255V (N-PE)
Voltage Protection level at In	1.5kV (L-N) 1.2kV (N-PE)
IP Rating	IP20
Weight	0.123kg
Number of Modules	1
Mounting	DIN Rail
Nominal discharge current (8/20)	20kA
Max discharge current (8/20)	40kA
Incoming Terminal Capacity	4 - 16mm ²
Outgoing Terminal Capacity	4 - 16mm ²
Torque Settings	1.2Nm (L/N) 2.0Nm (PE)
Operating Temperature Range	-40 - +80°C
Remote Signalling Contact	Switching Contact (NO/NC)
Colour	Grey
Compliance	UKCA, CE
Guarantee	1 Year
Standards	IEC / BS EN61643-11
Suitable for	TN-C-S, TN-S and TT Earthing
SPD Type	Type 2
Depth	70mm
Height	81mm
Width	18mm

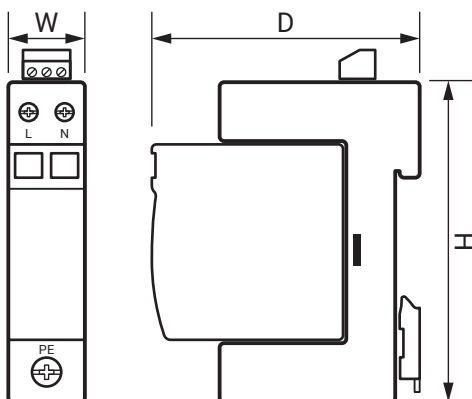

Errors and omissions excepted (E&OE). All information is subject to change without notice and is correct at the time of print. Refer to issue number and date below.

Tel: +44 (0)1302 342 642 • mcg.co.uk • ✉@mcg_industrial