


12 Way Metal Consumer Unit Isolator Controlled with 10 RCBOs

Product Ref: **MMSB1210RCBO**


Technical Features:

- Complete with fully fitted and pre-wired 2 pole 100A incoming isolator and 10 x RCBOs
- Ferruled cable ends for secure connections
- Fully enclosed metal construction body with drop-down metal cover. Raised keyholes for secure easy installation
- Multiple circular cable entry knockouts (M25, M32 and M40) plus rear aperture/rounded cable entries
- Finished in white polyester powder coating to RAL9010
- BS 7671 Amendment 3:2015 and BS EN 61439-3 compliant

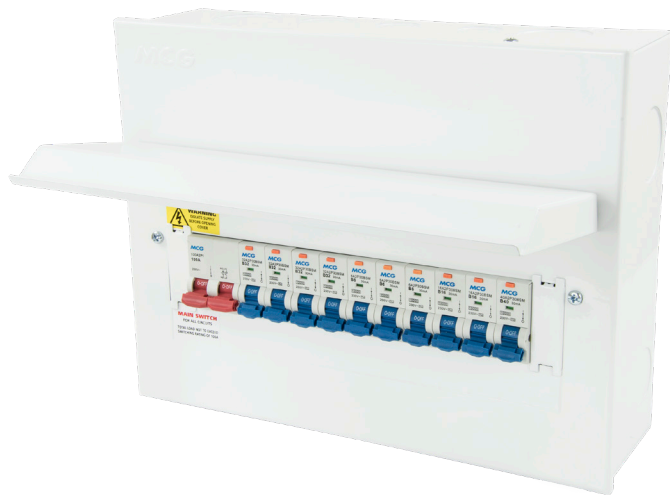

Product Specification

Voltage Rating	230V
Current Rating	100A
IP Rating	IP20
Weight	4.600kg
Incoming Device	100A Isolator
Number of Outgoing ways	12
Board Configuration	12
Cable Entry	Knockouts (M25, M32 and M40)
Supplied With	1 x 100A 2 Pole Isolator and 10 x RCBOs: 3 x 6A RCBOs Type B, 2 x 16A RCBOs Type B, 4 x 32A RCBOs Type B and 1 x 40A RCBO Type B
Mounting	Surface
Colour	White
Finish	Polyester Powder Coated
Material	Steel
Compliance	UKCA, CE
Guarantee	1 Year
Standards	BS 7671 Amendment 3:2015, BS EN 61439-3
Depth	112mm
Height	234mm
Width	305mm

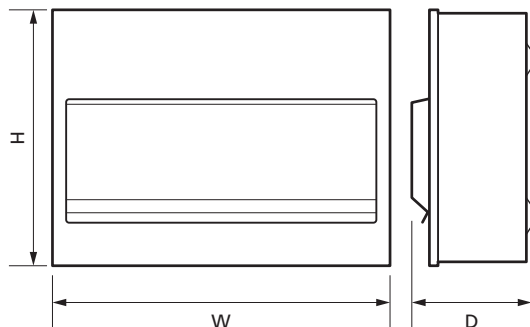

Errors and omissions excepted (E&OE). All information is subject to change without notice and is correct at the time of print. Refer to issue number and date below.

Tel: +44 (0)1302 342 642 • mcg.co.uk • [@mcg_industrial](https://twitter.com/mcg_industrial)