

## 14 Way Single Phase Pre-Wired SPD Metal Consumer Unit Isolator Controlled

Product Ref: **MMSB14SPDM**


### Technical Features:

- Supplied complete with fully fitted and pre-wired 1 x 2 pole 100A incoming Isolator, 1 x Type 2 SPD and 1 x 32A MCB
- Ferruled cable ends for secure connections
- Fully enclosed metal construction body with drop-down metal cover. Raised keyholes for secure easy installation
- Multiple circular cable entry knockouts top (M25, M32 and M40) plus rear aperture/rounded cable entries
- Finished in white polyester powder coating to RAL9010
- IP20 protection
- SPD is suitable for TN-C-S, TN-S and TT earthing systems
- SPD is compliant to 18th Edition Wiring Regulations (BS 7671:2018 Surge Protection)
- BS EN 61439-3 compliant



### Product Specification

Voltage Rating	230V
Current Rating	100A
IP Rating	IP20
Weight	3.470kg
Incoming Device	100A Isolator
Number of Outgoing ways	14
Cable Entry	Knockouts (M25, M32 and M40)
Surge Protection Fitted	Yes
Supplied With	1 x 100A 2 Pole Isolator, 1 x SPD (Type 2, TN-C-S, TN-S and TT Earthing) and accompanying 1 x 32A (6kA B Curve) MCB
Type	Isolator Controlled
Mounting	Surface
Colour	White
Finish	Polyester Powder Coated
Door Type	Top Hinged
Material	Steel
Compliance	UKCA, CE
Guarantee	1 Year
Standards	BS EN 61439-3
Depth	110mm
Height	235mm
Width	377mm

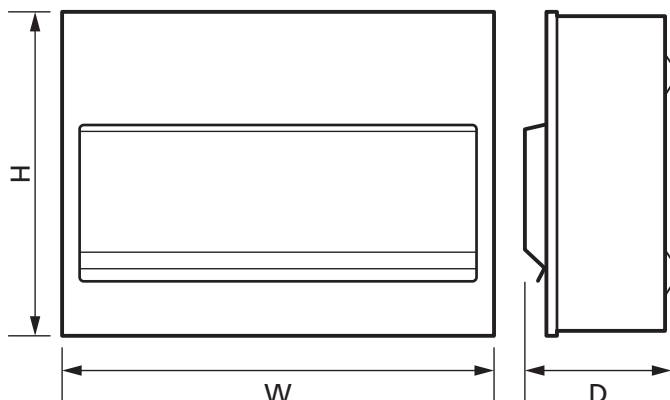

Errors and omissions excepted (E&OE). All information is subject to change without notice and is correct at the time of print. Refer to issue number and date below.

Tel: +44 (0)1302 342 642 • [mcg.co.uk](http://mcg.co.uk) • [@mcg\\_industrial](https://twitter.com/mcg_industrial)