

## 6 + 6 Dual RCD Split Load Metal Consumer Unit with 63A RCDs


Product Ref: **MMSB6+6/63**

### Technical Features:

- Complete with fully fitted and pre-wired 2 pole 100A incoming isolator and 2 x 63A 30mA RCD devices
- Ferruled cable ends for secure connections
- Fully enclosed metal construction body with drop-down metal cover. Raised keyholes for secure easy installation
- Multiple circular cable entry knockouts (M25, M32 and M40) plus rear aperture/rounded cable entries
- Finished in white polyester powder coating to RAL9010
- BS 7671 Amendment 3 and BS EN 61439-3 compliant

### Product Specification

Voltage Rating	230V
Current Rating	100A
RCD Rating	63A
IP Rating	IP20
Weight	3.715kg
Incoming Device	100A 2 Pole Isolator
Number of Outgoing ways	6 + 6
Number of Modules	18
Cable Entry	Knockouts (M25, M32 and M40)
Supplied With	2 x 63A 30mA 2 Pole RCDs
Type	Split Load Board
Mounting	Surface
Colour	White
Finish	Polyester Powder Coated
Material	Steel
Compliance	UKCA, CE
Guarantee	1 Year
Standards	BS 7671 Amendment 3, BS EN 61439-3
Depth	110mm
Height	235mm
Width	377mm

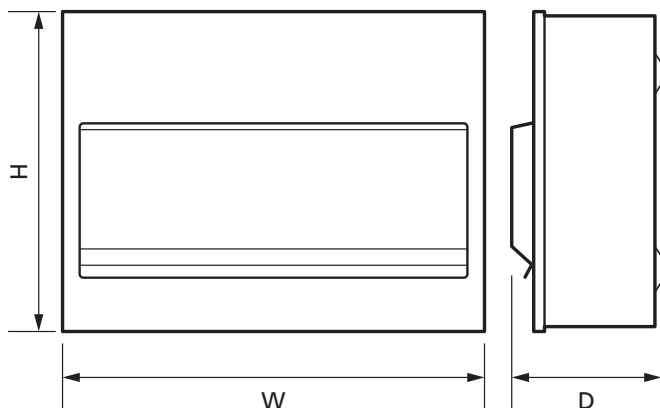

Errors and omissions excepted (E&OE). All information is subject to change without notice and is correct at the time of print. Refer to issue number and date below.

Tel: +44 (0)1302 342 642 • [mcg.co.uk](http://mcg.co.uk) • [@mcg\\_industrial](https://twitter.com/mcg_industrial)