

6 Way Single Phase Pre-Wired SPD Metal Consumer Unit Isolator Controlled

Product Ref: **MMSB6SPDM**


Technical Features:

- Supplied complete with fully fitted and pre-wired 1 x 2 pole 100A incoming Isolator, 1 x Type 2 SPD and 1 x 32A MCB
- Ferruled cable ends for secure connections
- Fully enclosed metal construction body with drop-down metal cover. Raised keyholes for secure easy installation
- Multiple circular cable entry knockouts top (M25, M32 and M40) plus rear aperture/rounded cable entries
- Finished in white polyester powder coating to RAL9010
- IP20 protection
- SPD is suitable for TN-C-S, TN-S and TT earthing systems
- SPD is compliant to 18th Edition Wiring Regulations (BS 7671:2018 Surge Protection)
- BS EN 61439-3 compliant



Product Specification

Voltage Rating	230V
Current Rating	100A
IP Rating	IP20
Weight	2.815kg
Incoming Device	100A Isolator
Number of Outgoing ways	6
Cable Entry	Knockouts (M25, M32 and M40)
Surge Protection Fitted	Yes
Supplied With	1 x 100A 2 Pole Isolator, 1 x SPD (Type 2, TN-C-S, TN-S and TT Earthing) and accompanying 1 x 32A (6kA B Curve) MCB
Type	Isolator Controlled
Mounting	Surface
Colour	White
Finish	Polyester Powder Coated
Door Type	Top Hinged
Material	Steel
Compliance	UKCA, CE
Guarantee	1 Year
Standards	BS EN 61439-3
Depth	110mm
Height	235mm
Width	269mm

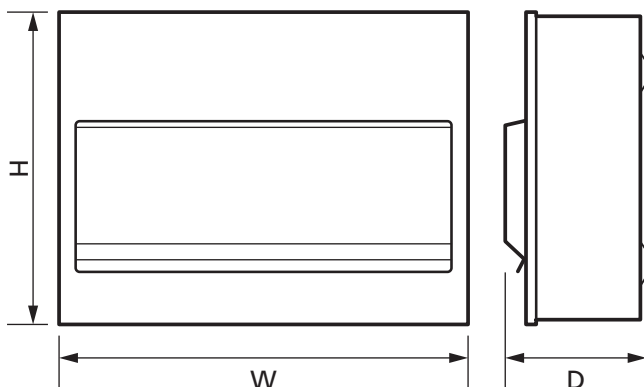

Errors and omissions excepted (E&OE). All information is subject to change without notice and is correct at the time of print. Refer to issue number and date below.

Tel: +44 (0)1302 342 642 • mcg.co.uk • [@mcg_industrial](https://twitter.com/mcg_industrial)