

8 Way Single Phase Pre-Wired SPD Metal Consumer Unit Isolator Controlled

Product Ref: **MMSB8SPDM**


Technical Features:

- Supplied complete with fully fitted and pre-wired 1 x 2 pole 100A incoming Isolator, 1 x Type 2 SPD and 1 x 32A MCB
- Ferruled cable ends for secure connections
- Fully enclosed metal construction body with drop-down metal cover. Raised keyholes for secure easy installation
- Multiple circular cable entry knockouts top (M25, M32 and M40) plus rear aperture/rounded cable entries
- Finished in white polyester powder coating to RAL9010
- IP20 protection
- SPD is suitable for TN-C-S, TN-S and TT earthing systems
- SPD is compliant to 18th Edition Wiring Regulations (BS 7671:2018 Surge Protection)
- BS EN 61439-3 compliant



Product Specification

| | |
|-------------------------|---|
| Voltage Rating | 230V |
| Current Rating | 100A |
| IP Rating | IP20 |
| Weight | 2.965kg |
| Incoming Device | 100A Isolator |
| Number of Outgoing ways | 8 |
| Cable Entry | Knockouts (M25, M32 and M40) |
| Surge Protection Fitted | Yes |
| Supplied With | 1 x 100A 2 Pole Isolator, 1 x SPD (Type 2, TN-C-S, TN-S and TT Earthing) and accompanying 1 x 32A (6kA B Curve) MCB |
| Type | Isolator Controlled |
| Mounting | Surface |
| Colour | White |
| Finish | Polyester Powder Coated |
| Door Type | Top Hinged |
| Material | Steel |
| Compliance | UKCA, CE |
| Guarantee | 1 Year |
| Standards | BS EN 61439-3 |
| Depth | 110mm |
| Height | 235mm |
| Width | 305mm |

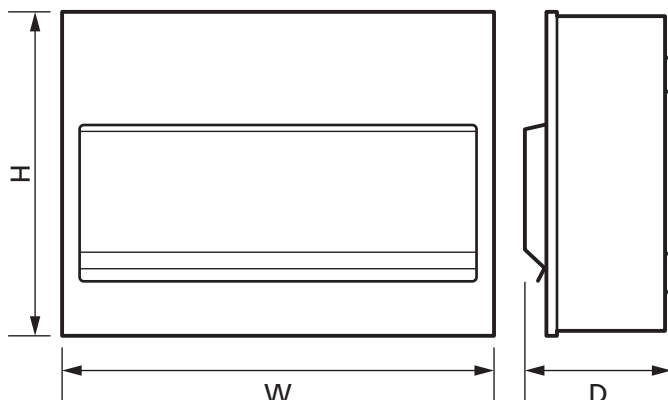

Errors and omissions excepted (E&OE). All information is subject to change without notice and is correct at the time of print. Refer to issue number and date below.

Tel: +44 (0)1302 342 642 • mcg.co.uk • @mcg_industrial