

## 25A 4 Pole Large Surface Mounting Rotary Isolator Plastic Enclosure IP65

Product Ref: **SMI25-4L**

### Technical Features:


- Insulated enclosure flame retardant material
- Low smoke and halogen free
- Easy access and switch removal
- Padlockable for added security
- Knockout cable entries
- Switch ratings at AC21
- Ideal for SWA cabling
- Room for extra auxiliary



Voltage Rating	690V
Current Rating	25A
IP Rating	IP65
Weight	0.667kg
Number of Poles	4 Pole
Mounting	Surface
Cable Entry	Knockout Cable Entries
Lockable	Yes
Colour	Red/Yellow/Grey
Material	PC
Operating Temperature Range	-5°C to 40°C
Compliance	UKCA, CE
Guarantee	1 Year
Standards	IEC/EN 60947-1, IEC/EN 60947-3
Depth	90mm
Height	175mm
Width	125mm

### Terminal Cross Section

Single / Multi Strand Wire	2.5 - 10mm <sup>2</sup>
Fine Strand Wire with Sleeve	0.75 - 6mm <sup>2</sup>
American wire gauge	AWG 10
Recommended Tightening Torque for Terminals	1.7Nm

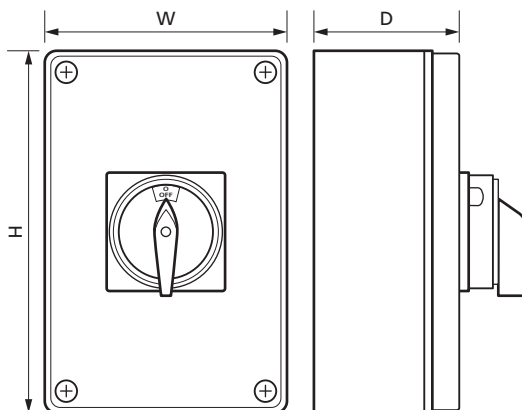

Errors and omissions excepted (E&OE). All information is subject to change without notice and is correct at the time of print. Refer to issue number and date below.

Tel: +44 (0)1302 342 642 • [mcg.co.uk](http://mcg.co.uk) • [X@mcg\\_industrial](mailto:info@mcg_industrial)