


40kA Type 2 Surge Protection Kit

Product Ref: **SPDT2PACK-M**

Technical Features:

- Fault tripping indicator window
- End of module life indication
- Ergonomic hand grip for easy installation
- Ideal for domestic applications
- Suitable for TN-C-S, TN-S and TT earthing systems
- SPD - no earth leakage
- SPD has pluggable and replaceable module
- Suitable for use with any brand of consumer unit
- SPD Conforms to IEC / BS EN61643-11

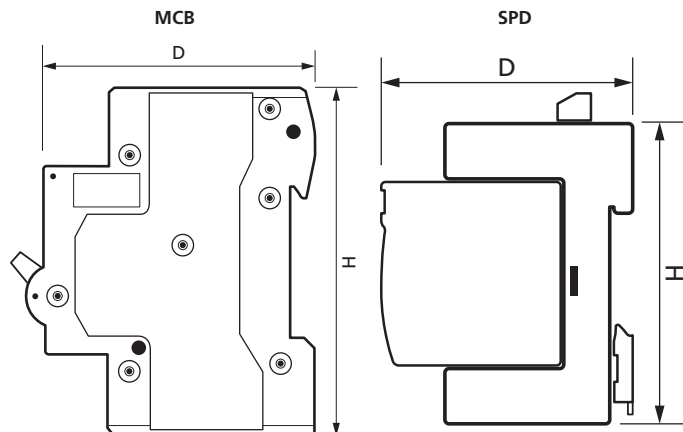

Product Specification

SPD

IP Rating	IP20
Weight	0.123kg
Number of Modules	1
Mounting	DIN Rail
Incoming / Outgoing Terminal Capacity	4 - 16mm ²
Remote Signalling Contact	Switching Contact (NO/NC)
Nominal discharge current (8/20)	20kA
Max discharge current (8/20)	40kA
Colour	Grey
Compliance	UKCA, CE
Guarantee	1 Years
Standards	IEC / BS EN61643-11
Suitable for	TN-C-S, TN-S and TT Earthing
SPD Type	2
Depth	70mm
Height	81mm
Width	18mm

MCB

Voltage Rating	230V
Current Rating	32A
Weight	0.110kg
Number of Modules	1
Incoming / Outgoing Terminal Capacity	25mm ²
Short Circuit Rating	6kA
Tripping Characteristics	B Curve
Mounting	Din Rail
Colour	Grey/Blue
Compliance	UKCA, CE
Guarantee	1 Year
Standards	IEC/EN 60898-1
Depth	66mm
Height	82.5mm
Width	18mm

Wire Length

1 x Earth Cable	280mm
1 x Neutral Cable	255mm
2 x Live Cables	120mm

Errors and omissions excepted (E&OE). All information is subject to change without notice and is correct at the time of print. Refer to issue number and date below.