

4 Module 3 Phase 4 Pole 40kA T2 Surge Protection Device


Product Ref: **TPN-T2SPD**

Technical Features:

- Insulated DIN rail clips
- Ergonomic hand grip for easy installation
- End of module life indication
- Pluggable and replaceable modules
- Suggested use in conjunction with MCG MCB **32A3PB10/TP** for additional protection (sold separately)
- Suitable for use with MCG range of TPN Boards

Product Specification

Voltage Rating	Uc:275V
Weight	0.380kg
Incoming Terminal Capacity	35mm ²
Number of Modules	4
Number of Poles	4 Pole
Outgoing Terminal Capacity	35mm ²
Short Circuit Rating	40kA
Mounting	Din Rail
Colour	Grey
Torque Setting	2Nm
Material	Plastic / Metal
Compliance	UKCA, CE
Standards	IEC/EN 61643-11
Suitable For	Suitable for TN-C-S, TN-S and TT earthing systems
Depth	66mm
Height	83mm
Width	72mm

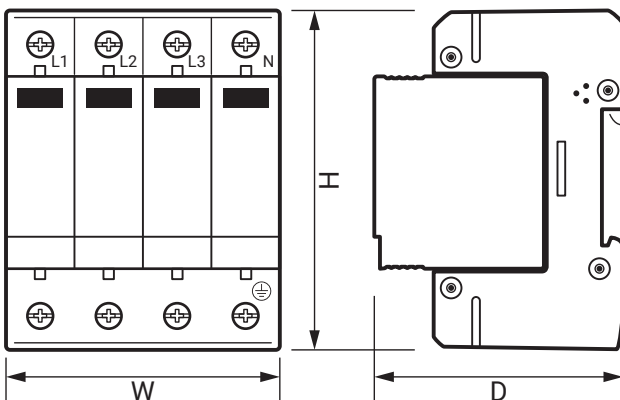

Errors and omissions excepted (E&OE). All information is subject to change without notice and is correct at the time of print. Refer to issue number and date below.

Tel: +44 (0)1302 342 642 • mcg.co.uk • XX@mcg_industrial