

## 4 Way Type B TP&N Board

c/w 125A Disconnecter, Surge Protection with MCB

Product Ref: **TPN4-125SPD**


### Technical Features:

- Rated voltage 240/415V 50/60Hz
- Modular construction design
- 125A 4 Pole Switch Disconnecter and Type 2 surge protection device with MCB included as standard
- 1.2 mm sheet steel enclosure, Polyester powder coated (colour RAL7035)
- Removable gland plates for top and bottom cable entry/exit
- Reversible and lockable door
- Removable pan assembly
- Tested to BS EN 61439-3, Degree Protection IP3X (door closed)
- Full optional accessories available



## Product Specification

Voltage Range	240/415V
Current Rating	125A
IP Rating	IP3X
Weight	12.680kg
Incoming Device	4 Pole 125A Switch Disconnecter
Incoming Terminal Capacity	50mm <sup>2</sup>
Door Type	Reversible/Lockable Hinged Door
Number of Outgoing ways	4
Outgoing Terminal Capacity	50mm <sup>2</sup>
Cable Entry	Top and Bottom Gland Plates
Gland Plate to Switch Disconnecter Distance	125mm
Supplied With	125A 4 Pole Switch Disconnecter and Type 2 surge protection device with 32A 3 Pole MCB
Mounting	Surface
Colour	Grey
Finish	Polyester Powder Coated
Material	Sheet Steel
Compliance	UKCA, CE
Guarantee	1 Year
Standards	BS EN 61439-3
Suitable For	Suitable for TN-C-S, TN-S and TT earthing systems
Depth	135mm
Height	510mm
Width	450mm

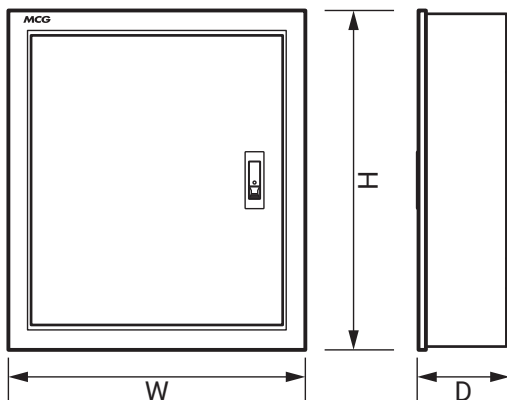

Errors and omissions excepted (E&OE). All information is subject to change without notice and is correct at the time of print. Refer to issue number and date below.

Tel: +44 (0)1302 342 642 • mcg.co.uk • [XX@mcg\\_industrial](mailto:XX@mcg_industrial)