

## 20mm Black PVC Flexible Conduit (10m Reel)


Product Ref: **V20/10M**

### Technical Features:

- Constructed from high quality black PVC over a rigid PVC spiral
- Temperature range -20 to +70°C
- IP65 ingress protection
- Complies with EN 61386
- UL94 V0 Flame retardant

## Product Specification

|                             |                                         |
|-----------------------------|-----------------------------------------|
| IP Rating                   | IP65                                    |
| Weight                      | 1.050kg                                 |
| Operating Temperature       | -20 - +70°C                             |
| Flame Retardant             | UL94 V0                                 |
| Compression Strength        | 320N                                    |
| Pull-off (Tensile) Strength | 250N                                    |
| Colour                      | Black                                   |
| Bending Radius - min        | 35mm                                    |
| Material                    | PVC                                     |
| Compliance                  | UKCA, CE                                |
| Guarantee                   | 1 Year                                  |
| Standards                   | EN 61386                                |
| Suitable For                | PVC Conduit Gland complete with Locknut |
| Diameter Ø                  | 20mm                                    |
| Internal Diameter Ø         | 16mm                                    |
| Length                      | 10m                                     |

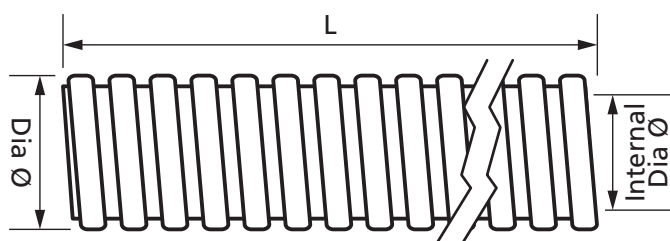

Errors and omissions excepted (E&OE). All information is subject to change without notice and is correct at the time of print. Refer to issue number and date below.

Tel: +44 (0)1302 342 642 • mcg.co.uk • @mcg\_industrial