

MIRA VIGOUR THERMOSTATIC

Part Number: White/Chrome: 1.1532.353



THE SAFE, AFFORDABLE,
EASY TO INSTALL
POWER SHOWER



HIGH PERFORMANCE

Up to 14 l/min

TEMPERATURE CONTROL

Thermostatic
temperature stability

EASY TO FIT

No need to prime. Accepts
rising, falling and rear supplies.

EASY TO SERVICE

Removable filters and
check valves

FOR YOUR CUSTOMER

Separate flow and
temperature controls

Maximum temperature
stop – enhances safety

5 spray 9 cm showerhead
with rub clean nozzles

TECH DETAILS

TEMPERATURE CONTROL

Control type: Thermostatic

INSTALLATION

Water entry points: Left (rising, falling & rear)

Cable entry points: Left (rising, falling & rear)

Inlet connections: 15 mm dual entry push fit

Outlet connections: ½" BSP male

Supply voltage: 230v ± 10%

Supply rating: 3 amp

Terminal block connections: maximum 2.5 mm²

SUPPLY CONDITIONS (HOT AND COLD SUPPLIES TO BE AT NOMINALLY EQUAL PRESSURE)

Cold water range: Up to 25°C

Hot water range: 50°C-85°C (operating)
55°C-65°C (recommended)

Minimum maintained pressure: 0.01 bar (100 mm head)

Maximum maintained pressure: 0.5 bar (5 metre head)

Maximum static pressure: 1.0 bar (10 metre head)

PERFORMANCE

Flow rate: 14 l/min at 0.7 bar

Temperature stability: ± 2°C

SAFETY FEATURES


Phased shutdown: Yes

Factory set to safe max temp: Yes

ACCESSORIES

Wide range of accessories available at
www.mirashowers-store.co.uk

TECH DRAWINGS

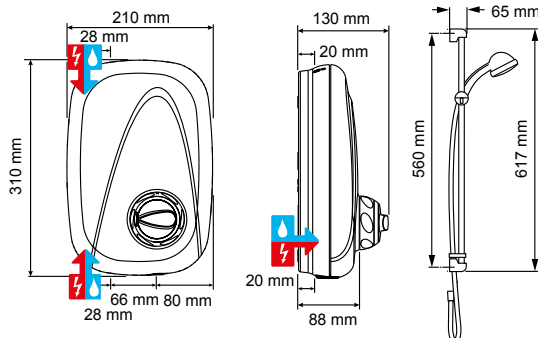

WRAS
Approved



BEAB
Approved