

MIRA VIGOUR MANUAL

Part Number: White/Chrome: 11532.354

THE AFFORDABLE,
EASY TO INSTALL
POWER SHOWER



TECH DETAILS

TEMPERATURE CONTROL

Control type: Manual

INSTALLATION

Water entry points: Left (rising, falling & rear)

Cable entry points: Left (rising, falling & rear)

Inlet connections: 15mm dual entry push fit

Outlet connections: 1/2" BSP male

Supply voltage: 230V ± 10%

Supply rating: 3 amp

Terminal block connections: Maximum 2.5mm²

SUPPLY CONDITIONS (hot and cold supplies to be at nominally equal pressure)

Cold water range: Up to 25°C

Hot water range: 50°C-85°C (operating)

55°C-65°C (recommended)

Minimum maintained pressure: 0.01 bar (100mm head)

Maximum maintained pressure: 0.5 bar (5 metre head)

Maximum static pressure: 1.0 bar (10 metre head)

PERFORMANCE

Flow rate: 12 l/min at 0.7 bar

Temperature stability: ± 6°C

SAFETY FEATURES

Phased shutdown: Yes

Factory set to safe max temp: Yes

ACCESSORIES

Wide range of accessories available at

www.mirashowers-store.co.uk

HIGH PERFORMANCE

Up to 12 l/min

EASY TO FIT

No need to prime. Accepts rising, falling and rear supplies

EASY TO SERVICE

Removable filters and check valves

FOR YOUR CUSTOMER


Separate flow and temperature controls

Maximum temperature stop – enhances safety

5 spray 9cm showerhead with rub clean nozzles



TECH DRAWINGS

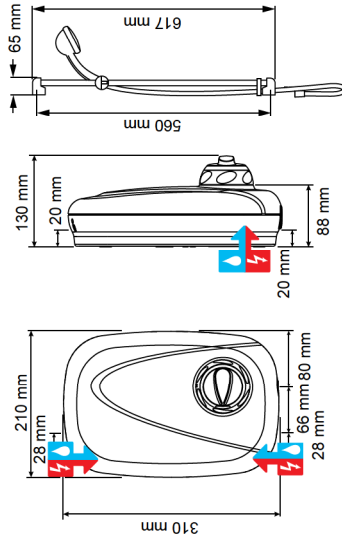

MIRA VIGOUR THERMOSTATIC

Part Number: White/Chrome: 11532.353

THE SAFE,
AFFORDABLE,
EASY TO INSTALL
POWER SHOWER



TECH DETAILS

TEMPERATURE CONTROL

Control type: Thermostatic

INSTALLATION

Water entry points: Left (rising, falling & rear)

Cable entry points: Left (rising, falling & rear)

Inlet connections: 15mm dual entry push fit

Outlet connections: 1/2" BSP male

Supply voltage: 230V ± 10%

Supply rating: 3 amp

Terminal block connections: maximum 2.5mm²

SUPPLY CONDITIONS (hot and cold supplies to be at nominally equal pressure)

Cold water range: Up to 25°C

Hot water range: 50°C-85°C (operating)

55°C-65°C (recommended)

Minimum maintained pressure: 0.01 bar (100mm head)

Maximum maintained pressure: 0.5 bar (5 metre head)

Maximum static pressure: 1.0 bar (10 metre head)

PERFORMANCE

Flow rate: 14 l/min at 0.7 bar

Temperature stability: ± 2°C

SAFETY FEATURES

Phased shutdown: Yes

Factory set to safe max temp: Yes

ACCESSORIES

Wide range of accessories available at

www.mirashowers-store.co.uk

HIGH PERFORMANCE

Up to 14 l/min

TEMPERATURE CONTROL

Thermostatic temperature stability

EASY TO FIT

No need to prime. Accepts rising, falling and rear supplies

EASY TO SERVICE

Removable filters and check valves

FOR YOUR CUSTOMER

Separate flow and temperature controls

Maximum temperature stop – enhances safety

5 spray 9cm showerhead with rub clean nozzles



TECH DRAWINGS

