

DATASHEET

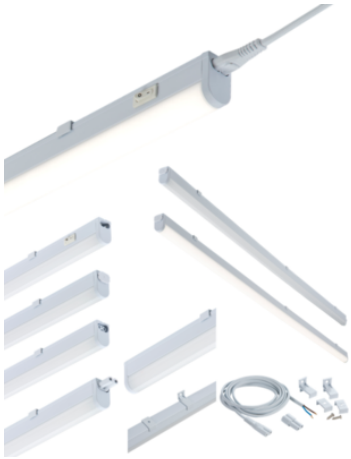

UCLED22CW

230V 22W LED Linkable Striplight 4000K (1438mm)

www.mlaccessories.co.uk



MLA PART CODE	UCLED22CW
DESCRIPTION	230V 22W LED Linkable Striplight 4000K (1438mm)
NET WEIGHT (KG)	0.394
FINISH	White
DIFFUSER	Opal
DIMENSIONS (MM)	Length - 1438 Width - 22.8 Projection - 36
CONSTRUCTION	Construction - Polycarbonate
CLASS	II
IP RATING	IP20
WATTAGE (W)	22
LAMP TECHNOLOGY	LED
LAMP INCLUDED	Yes
LUMENS (LM)	1730
LUMENS LIGHT SOURCE ONLY (LM)	2565
LUMEN TOLERANCE	5%
EFFICACY (LM/W)	123.9
CIRCUIT WATTAGE (W)	20.7
CCT	4000K
LIGHT COLOUR	Cool White
CRI	>80
SDCM	<6
RUNNING CURRENT (A)	0.152
DISPLACEMENT FACTOR	>0.9
SVM	0.008
PST-LM	0.001
BEAM ANGLE (DEGREES)	145
LIFE SPAN (HRS)	30,000
L70B50 LIFESPAN (HRS)	54,000

ML ACCESSORIES LTD

ML Accessories Ltd. reserves the right to withdraw, improve, or modify any design without prior notification.
ML Accessories Ltd. cannot be held responsible for the incorrect application of any product.

DIMMABLE	No
OPERATING TEMPERATURE	-10~40°C
INPUT VOLTAGE	230V 50Hz
CABLE LENGTH (M)	2
WARRANTY	3year(s)
MANUFACTURED IN ACCORDANCE WITH	BS EN 60598
ORIGIN OF MANUFACTURE	China
DECLARATION OF CONFORMITY (HELD ON FILE)	Yes
EAN	5055832977872

Date Created: 12/02/2024 11:22

ML Accessories Ltd. reserves the right to withdraw, improve, or modify any design without prior notification.
ML Accessories Ltd. cannot be held responsible for the incorrect application of any product.